



MOTOROLA

Product Preview

Dual-Band GSM GPRS 3.6 V Integrated Power Amplifier

The MRFIC1869 is a dual-band single supply RF Power Amplifier for GSM900/DCS1800 hand held radios. The device is packaged in a MLF-32 with exposed backside pad allowing excellent electrical and thermal performance through a solderable contact.

- Single Supply Enhancement Mode pHEMT Technology
- Internal Input Matching
- High Power and Efficiency
- Typical 3.6 V Characteristics:
 - $P_{out} = 35.8 \text{ dBm}$, PAE = 55% for GSM
 - $P_{out} = 34 \text{ dBm}$, PAE = 45% for DCS
- Tri-Band Capability¹

MRFIC1869

DUAL-BAND GSM GPRS 3.6 V IPA


SEMICONDUCTOR TECHNICAL DATA

PLASTIC PACKAGE
CASE TBD
(MLF-32, 5x5)

ORDERING INFORMATION


Device	Operating Temperature Range	Package
MRFIC1869	$T_C = -35 \text{ to } 100^\circ\text{C}$	MLF-32

Simplified Block Diagram

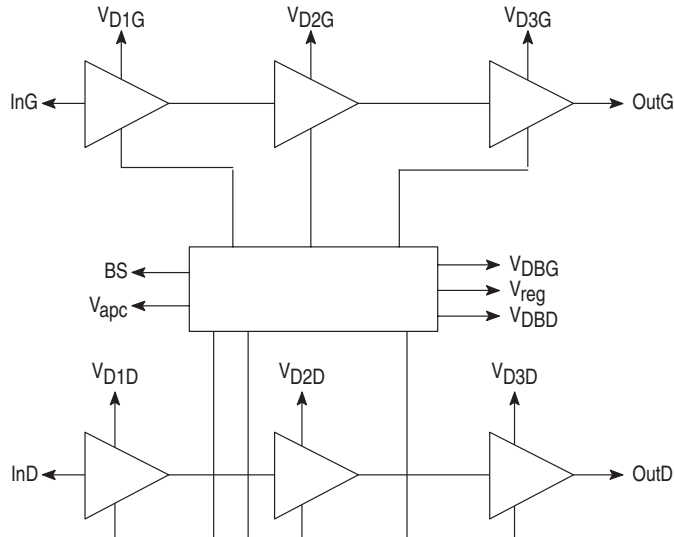


1. This product can be used in a tri-band application with a specific DCS1800/PCS1900 matching network. This matching network results in a degradation of P_{out} , PAE and input power as noted in the Electrical Characteristics table.

PIN CONNECTIONS

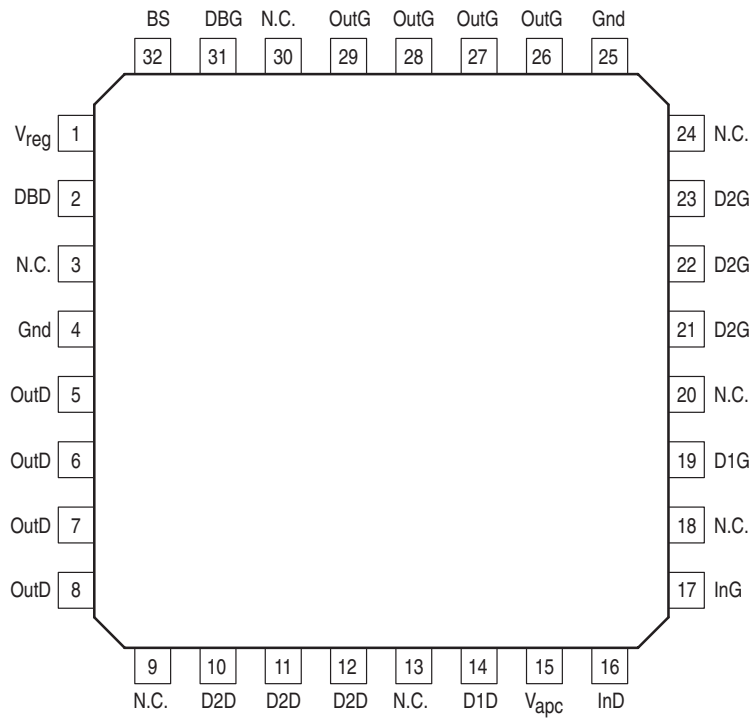

OUTLINE DIMENSIONS

PLASTIC PACKAGE
CASE TBD
(MLF-32, 5x5)

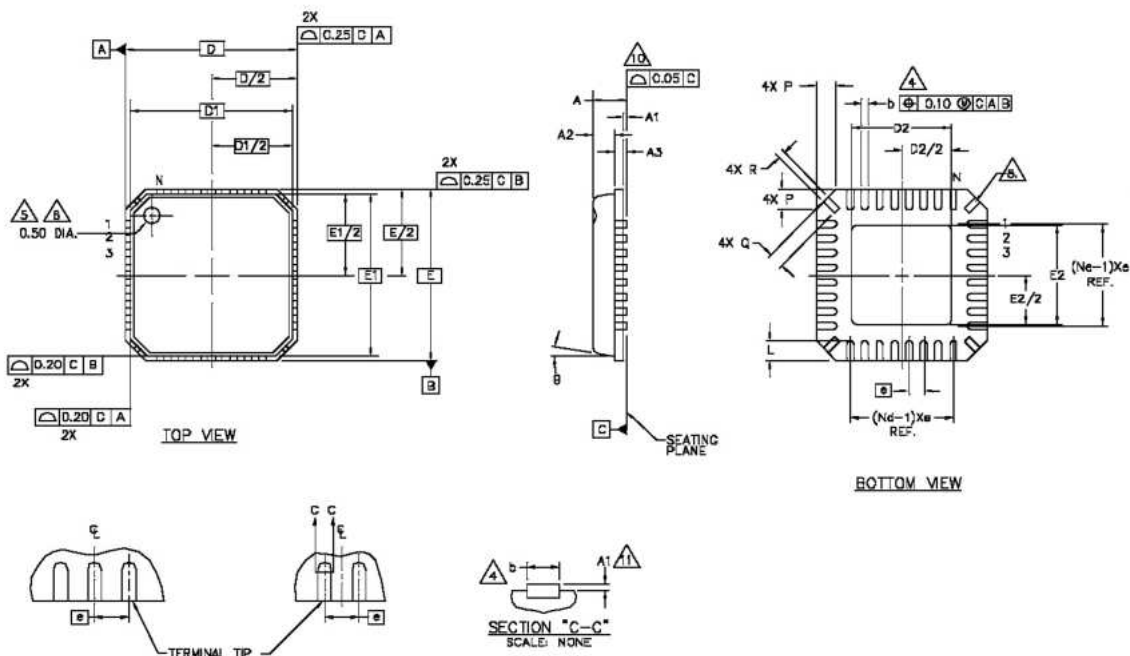

FOR ODD TERMINAL/SIDE

FOR EVEN TERMINAL/SIDE

PITCH VARIATION A				PITCH VARIATION B				PITCH VARIATION C				PITCH VARIATION D			
MIN.	NOM.	MAX.		MIN.	NOM.	MAX.		MIN.	NOM.	MAX.		MIN.	NOM.	MAX.	
15	0.90 BSC			20	0.85 BSC			28	0.90 BSC			32	0.90 BSC		
Nd	4			Nd	5			Nd	7			Nd	8		
Ne	4			Ne	5			Ne	7			Ne	8		
L	0.50	0.60	0.75	L	0.50	0.60	0.75	L	0.50	0.60	0.75	L	0.30	0.40	0.55
b	0.28	0.33	0.40	b	0.23	0.28	0.35	b	0.18	0.23	0.30	b	0.18	0.23	0.30
Q	0.30	0.40	0.65	Q	0.30	0.40	0.65	Q	0.30	0.40	0.65	Q	0.05	0.20	0.45
D2	SEE EXPOSED PAD VARIATION B			D2	SEE EXPOSED PAD VARIATION B			D2	SEE EXPOSED PAD VARIATION B			D2	SEE EXPOSED PAD VARIATION A		
E2	SEE EXPOSED PAD VARIATION B			E2	SEE EXPOSED PAD VARIATION B			E2	SEE EXPOSED PAD VARIATION B			E2	SEE EXPOSED PAD VARIATION A		

SYMBOLS	MIN	NOM	MAX	MIN	NOM	MAX	NOTE
EXPOSED PAD A	2.95	3.10	3.25	2.95	3.10	3.25	
VARIATIONS B	2.55	2.70	2.85	2.55	2.70	2.85	

EXAMPLE: WE CAN CALL VARIATION "B" FOR 20 TERMINAL MLP2.
WITH 2.70mm X 2.70mm NOMINAL EXPOSED PAD DIMENSION.
THE FORMER ONE IN VARIATION IS FOR PITCH VARIATION AND
THE LETTER ONE IS FOR EXPOSED PAD VARIATION.

COMMON DIMENSIONS				
MIN.	NOM.	MAX.		
A	0.85	1.00		
A1	0.00	0.01	0.05	11
A2	0.65	0.80		
A3	0.20	REF.		
D	5.00	BSC		
D1	4.75	BSC		
E	5.00	BSC		
E1	4.75	BSC		
θ			12°	
P	0.24	0.42	0.60	
R	0.13	0.17	0.23	

- NOTES:
1. DIE THICKNESS ALLOWABLE IS 0.305mm MAXIMUM (0.012 INCHES MAXIMUM).
 2. DIMENSIONING & TOLERANCES CONFORM TO ASME Y14.5M - 1994.
 3. N IS THE NUMBER OF TERMINALS.
Nd IS THE NUMBER OF TERMINALS IN X-DIRECTION &
Ne IS THE NUMBER OF TERMINALS IN Y-DIRECTION.
 4. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25mm FROM TERMINAL TIP.
 5. THE PIN #1 IDENTIFIER MUST BE EXISTED ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR OTHER FEATURE OF PACKAGE BODY.
 6. EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.
 7. ALL DIMENSIONS ARE IN MILLIMETERS.
 8. THE SHAPE SHOWN ON FOUR CORNERS ARE NOT ACTUAL I/O.
 9. PACKAGE WARPAGE MAX 0.05mm.
 10. APPLIED FOR EXPOSED PAD AND TERMINALS.
EXCLUDE EMBEDDING PART OF EXPOSED PAD FROM MEASURING.
 11. APPLIED ONLY FOR TERMINALS.

MRFIC1869

Freescale Semiconductor, Inc.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPS, Technical Information Center, 3-20-1,
Minami-Azabu, Minato-ku, Tokyo 106-8573 Japan. 81-3-3440-3569

Technical Information Center: 1-800-521-6274

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2, Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.
852-26668334

HOME PAGE: <http://www.motorola.com/semiconductors/>

**MOTOROLA**

◆ **For More Information On This Product,
Go to: www.freescale.com**

MRFIC1869PP/D