

General purpose controlled avalanche rectifiers

BYD17 series

FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Shipped in 8 mm embossed tape
- Smallest surface mount rectifier outline.

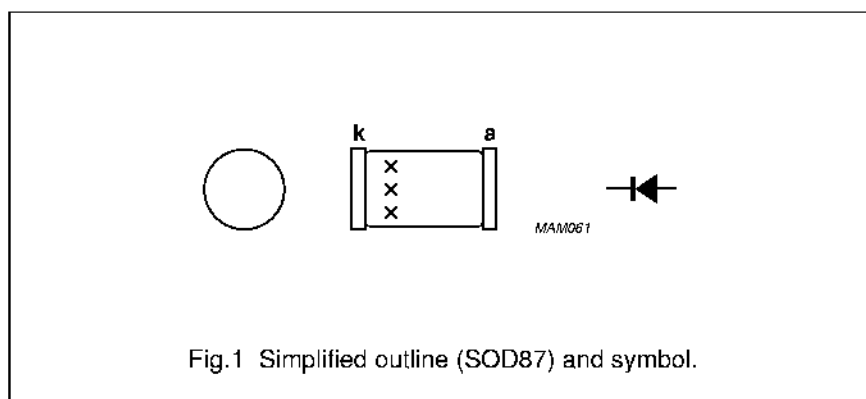


Fig.1 Simplified outline (SOD87) and symbol.

DESCRIPTION

Cavity free cylindrical glass package through Implotec™(1) technology.

This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

(1) Implotec is a trademark of Philips.

MARKING

TYPE NUMBER	MARKING CODE
BYD17D	17D PH
BYD17G	17G PH
BYD17J	17J PH
BYD17K	17K PH
BYD17M	17M PH

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RRM}	repetitive peak reverse voltage				
	BYD17D		—	200	V
	BYD17G		—	400	V
	BYD17J		—	600	V
	BYD17K		—	800	V
	BYD17M		—	1000	V
V_{RWM}	crest working reverse voltage				
	BYD17D		—	200	V
	BYD17G		—	400	V
	BYD17J		—	600	V
	BYD17K		—	800	V
	BYD17M		—	1000	V
V_R	continuous reverse voltage				
	BYD17D		—	200	V
	BYD17G		—	400	V
	BYD17J		—	600	V
	BYD17K		—	800	V
	BYD17M		—	1000	V

General purpose controlled avalanche rectifiers

BYD17 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$I_{F(AV)}$	average forward current	$T_{tp} = 105\text{ }^{\circ}\text{C}$; averaged over any 20 ms period; see Figs 2 and 4	–	1.5	A
		$T_{amb} = 65\text{ }^{\circ}\text{C}$; PCB mounting (see Fig.9); averaged over any 20 ms period; see Figs 3 and 4	–	0.6	A
I_{FSM}	non-repetitive peak forward current	$t = 10\text{ ms}$ half sinewave; $T_j = T_{j\text{ max}}$ prior to surge; $V_R = V_{RRM\text{ max}}$	–	20	A
E_{RSM}	non-repetitive peak reverse avalanche energy	$L = 120\text{ mH}$; $T_j = T_{j\text{ max}}$ prior to surge; inductive load switched off	–	7	mJ
T_{stg}	storage temperature		–65	+175	$^{\circ}\text{C}$
T_j	junction temperature	see Fig.5	–65	+175	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

$T_j = 25\text{ }^{\circ}\text{C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	forward voltage	$I_F = 1\text{ A}$; $T_j = T_{j\text{ max}}$; see Fig.6	–	–	0.93	V
		$I_F = 1\text{ A}$; see Fig.6	–	–	1.05	V
$V_{(BR)R}$	reverse avalanche breakdown voltage	$I_R = 0.1\text{ mA}$				
			225	–	–	V
			450	–	–	V
			650	–	–	V
			900	–	–	V
			1100	–	–	V
I_R	reverse current	$V_R = V_{RRM\text{ max}}$; see Fig.7	–	–	1	μA
		$V_R = V_{RRM\text{ max}}$; $T_j = 165\text{ }^{\circ}\text{C}$; see Fig.7	–	–	100	μA
t_{rr}	reverse recovery time	when switched from $I_F = 0.5\text{ A}$ to $I_R = 1\text{ A}$; measured at $I_R = 0.25\text{ A}$; see Fig.10	–	3	–	μs
C_d	diode capacitance	$V_R = 0\text{ V}$; $f = 1\text{ MHz}$; see Fig.8	–	21	–	pF

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\text{ j-tp}}$	thermal resistance from junction to tie-point		30	K/W
$R_{th\text{ j-a}}$	thermal resistance from junction to ambient	note 1	150	K/W


Note

1. Device mounted on epoxy-glass printed-circuit board, 1.5 mm thick; thickness of copper $\geq 40\text{ }\mu\text{m}$, see Fig.9.
For more information please refer to the "General Part of associated Handbook".

General purpose controlled avalanche rectifiers


BYD17 series

GRAPHICAL DATA

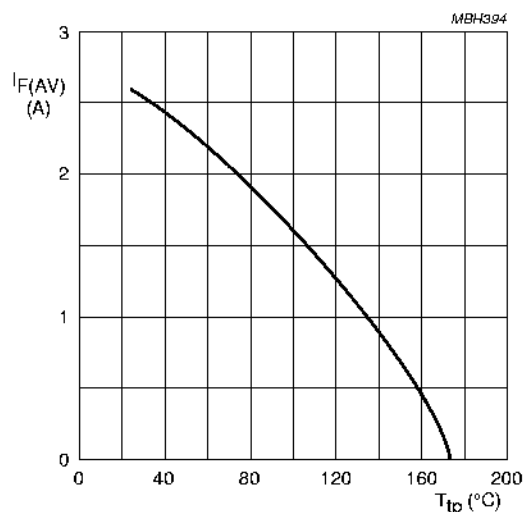

$\alpha = 1.57$; $V_R = V_{RRMmax}$; $\delta = 0.5$.


Fig.2 Maximum permissible average forward current as a function of tie-point temperature (including losses due to reverse leakage).

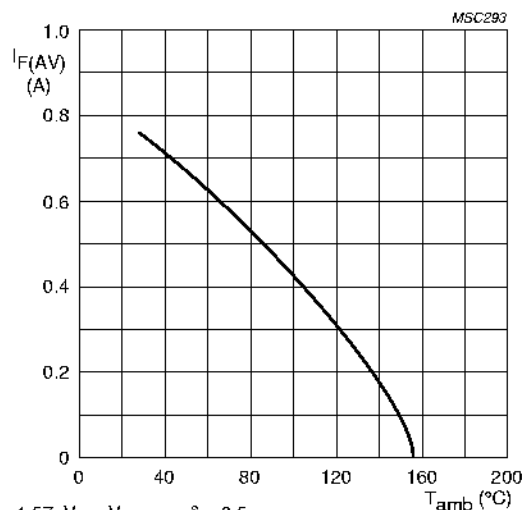

$\alpha = 1.57$; $V_R = V_{RRMmax}$; $\delta = 0.5$.


Device mounted as shown in Fig.9.

Fig.3 Maximum permissible average forward current as a function of ambient temperature (including losses due to reverse leakage).

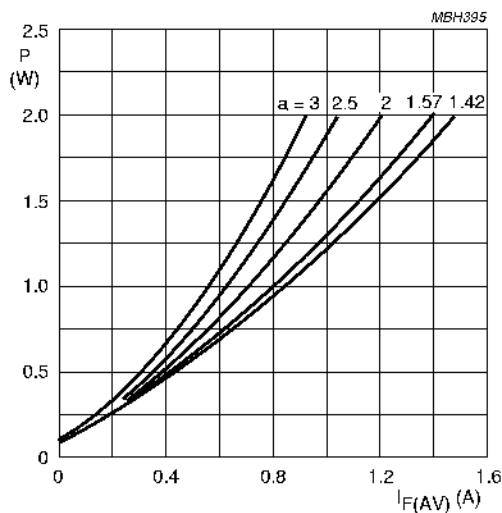

$\alpha = I_{F(RMS)}/I_{F(AV)}$; $V_R = V_{RRMmax}$; $\delta = 0.5$.

Fig.4 Maximum steady state power dissipation (forward plus leakage current losses, excluding switching losses) as a function of average forward current.

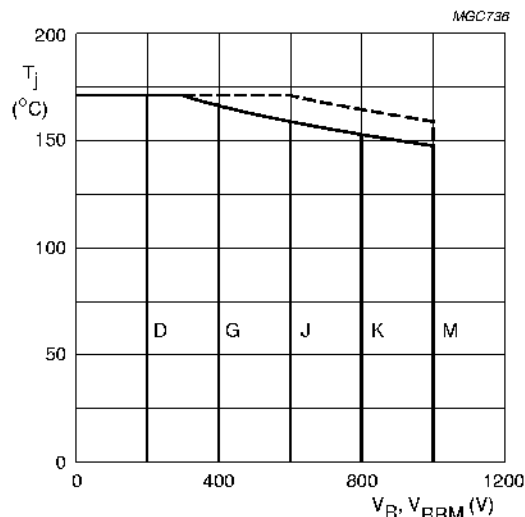


Solid line = V_R .

Dotted line = V_{RRM} ; $\delta = 0.5$.

Fig.5 Maximum permissible junction temperature as a function of reverse voltage.


General purpose controlled avalanche rectifiers

BYD17 series

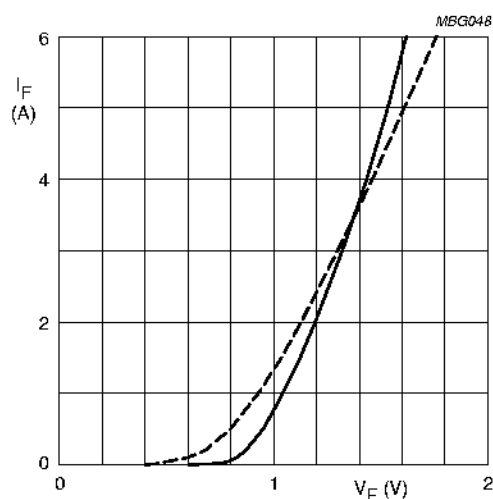


Solid line: $T_j = 25\text{ °C}$.
Dotted line: $T_j = 175\text{ °C}$.

Fig. 6 Forward current as a function of forward voltage; maximum values.

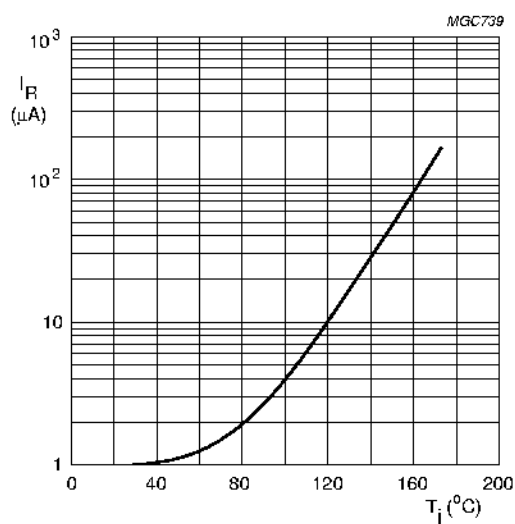


$V_R = V_{RRMmax}$.

Fig. 7 Reverse current as a function of junction temperature; maximum values.

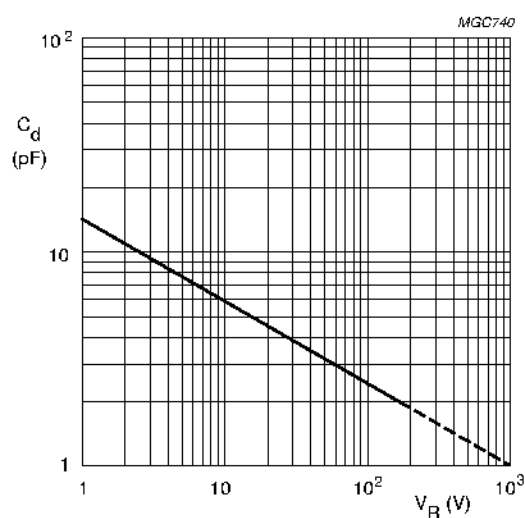

$f = 1\text{ MHz}$; $T_j = 25\text{ °C}$.

Fig. 8 Diode capacitance as a function of reverse voltage; typical values.


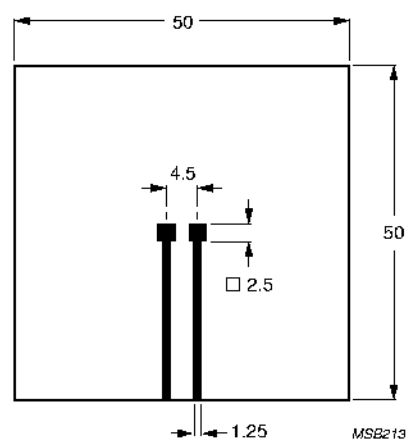


Dimensions in mm.

Fig. 9 Printed-circuit board for surface mounting.

General purpose controlled avalanche rectifiers

BYD17 series

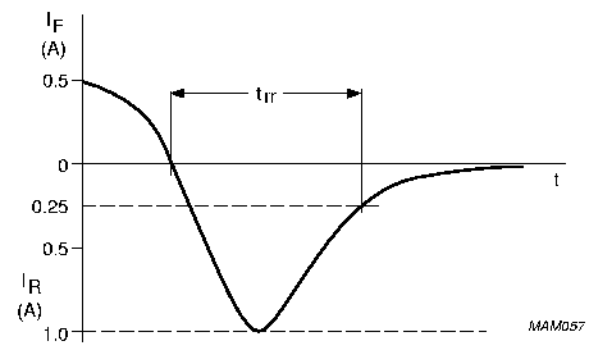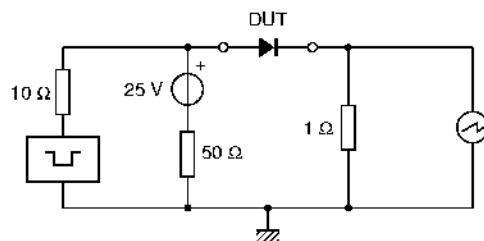

Input impedance oscilloscope: 1 M Ω , 22 pF; $t_r \leq 7$ ns.

Source impedance: 50 Ω ; $t_r \leq 15$ ns.

Fig.10 Test circuit and reverse recovery time waveform and definition.



General purpose controlled avalanche rectifiers

BYD17 series

PACKAGE OUTLINE


Hermetically sealed glass surface mounted package;
Implotec™(1) technology; 2 connectors

SOD87

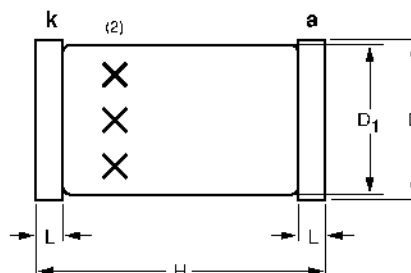

DIMENSIONS (mm are the original dimensions)

UNIT	D	D1	H	L
mm	2.1 2.0	2.0 1.8	3.7 3.3	0.3



Notes

1. Implotec is a trademark of Philips.
2. The marking indicates the cathode.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOD87	100H03					99-03-31 99-06-04

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.