

LM79XX Series 3-Terminal Negative Regulators

General Description

The LM79XX series of 3-terminal regulators is available with fixed output voltages of $-5V$, $-8V$, $-12V$, and $-15V$. These devices need only one external component—a compensation capacitor at the output. The LM79XX series is packaged in the TO-220 power package and is capable of supplying 1.5A of output current.

These regulators employ internal current limiting, safe area protection and thermal shutdown for protection against virtually all overload conditions.

Low ground pin current of the LM79XX series allows output voltage to be easily boosted above the preset value with a resistor divider. The low quiescent current drain of


these devices with a specified maximum change with line and load ensures good regulation in the voltage boosted mode.

For applications requiring other voltages, see LM137 data sheet.

Features


- Thermal, short circuit and safe area protection
- High ripple rejection
- 1.5A output current
- 4% tolerance on preset output voltage

Connection Diagrams

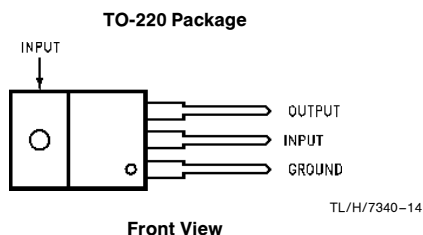

Order Number LM7905CT, LM7912CT or LM7915CT
See NS Package Number TO3B

Typical Applications

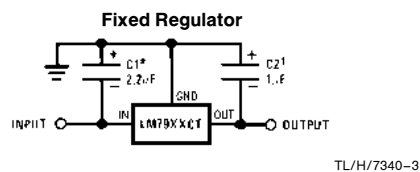

*Required if regulator is separated from filter capacitor by more than 3". For value given, capacitor must be solid tantalum. 25 μF aluminum electrolytic may be substituted.

†Required for stability. For value given, capacitor must be solid tantalum. 25 μF aluminum electrolytic may be substituted. Values given may be increased without limit.

For output capacitance in excess of 100 μF , a high current diode from input to output (1N4001, etc.) will protect the regulator from momentary input shorts.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.


Input Voltage	
($V_O = -5V$)	-25V
($V_O = -12V$ and $-15V$)	-35V

Input-Output Differential	
($V_O = -5V$)	25V
($V_O = -12V$ and $-15V$)	30V
Power Dissipation (Note 2)	Internally Limited
Operating Junction Temperature Range	0°C to +125°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	230°C

Electrical Characteristics Conditions unless otherwise noted: $I_{OUT} = 500$ mA, $C_{IN} = 2.2$ μ F, $C_{OUT} = 1$ μ F, 0°C $\leq T_J \leq +125^\circ$ C, Power Dissipation ≤ 1.5 W.

Part Number			LM7905C			Units
Output Voltage			− 5V			
Input Voltage (unless otherwise specified)			− 10V			
Symbol	Parameter	Conditions	Min	Typ	Max	
V _O	Output Voltage	T _J = 25°C 5 mA ≤ I _{OUT} ≤ 1A, P ≤ 15W	−4.8 −4.75	−5.0	−5.2 −5.25	V V V
ΔV _O	Line Regulation	T _J = 25°C, (Note 3)	8 (−25 ≤ V _{IN} ≤ −7) 2 (−12 ≤ V _{IN} ≤ −8)			50 15 V V mV V
ΔV _O	Load Regulation	T _J = 25°C, (Note 3) 5 mA ≤ I _{OUT} ≤ 1.5A 250 mA ≤ I _{OUT} ≤ 750 mA	15 5			100 50 mV mV
I _Q	Quiescent Current	T _J = 25°C	1			2 mA
ΔI _Q	Quiescent Current Change	With Line With Load, 5 mA ≤ I _{OUT} ≤ 1A	0.5 (−25 ≤ V _{IN} ≤ −7) 0.5			mA V mA
V _n	Output Noise Voltage	T _A = 25°C, 10 Hz ≤ f ≤ 100 Hz	125			μV
	Ripple Rejection	f = 120 Hz	54	66 (−18 ≤ V _{IN} ≤ −8)		dB V
	Dropout Voltage	T _J = 25°C, I _{OUT} = 1A	1.1			V
I _{OMAX}	Peak Output Current	T _J = 25°C	2.2			A
	Average Temperature Coefficient of Output Voltage	I _{OUT} = 5 mA, 0 C ≤ T _J ≤ 100°C	0.4			mV/°C

Typical Applications (Continued)

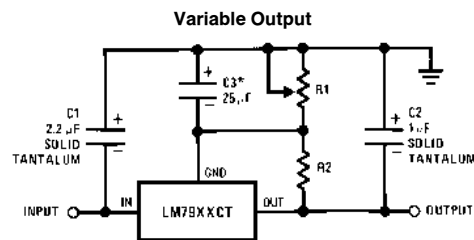

*Improves transient response and ripple rejection. Do not increase beyond 50 μ F.

TL/H/7340-2

$$V_{OUT} = V_{SET} \left(\frac{R1 + R2}{R2} \right)$$

Select R2 as follows:
LM7905CT 300 Ω
LM7912CT 750 Ω
LM7915CT 1k

Electrical Characteristics (Continued) Conditions unless otherwise noted: $I_{OUT} = 500 \text{ mA}$, $C_{IN} = 2.2 \mu\text{F}$, $C_{OUT} = 1 \mu\text{F}$, $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$, Power Dissipation = 1.5W .


Part Number			LM7912C			LM7915C			Units
Output Voltage			− 12V			− 15V			
Input Voltage (unless otherwise specified)			− 19V			− 23V			
Symbol	Parameter	Conditions	Min	Typ	Max	Min	Typ	Max	
V _O	Output Voltage	T _J = 25°C 5 mA ≤ I _{OUT} ≤ 1A, P ≤ 15W	−11.5 −11.4 (−27 ≤ V _{IN} ≤ −14.5)	−12.0 −12.6 (−14.5)	−12.5 −12.6 (−14.5)	−14.4 −14.25 (−30 ≤ V _{IN} ≤ −17.5)	−15.0 −15.75 (−17.5)	−15.6 −15.75 (−17.5)	V V V
ΔV _O	Line Regulation	T _J = 25°C, (Note 3)	5 (−30 ≤ V _{IN} ≤ −14.5) 3 (−22 ≤ V _{IN} ≤ −16)			80 (−30 ≤ V _{IN} ≤ −17.5) 30 (−26 ≤ V _{IN} ≤ −20)			mV V mV V
ΔV _O	Load Regulation	T _J = 25°C, (Note 3) 5 mA ≤ I _{OUT} ≤ 1.5A 250 mA ≤ I _{OUT} ≤ 750 mA	15 5 200 75			15 5 200 75			mV mV
I _Q	Quiescent Current	T _J = 25°C	1.5 3			1.5 3			mA
ΔI _Q	Quiescent Current Change	With Line With Load, 5 mA ≤ I _{OUT} ≤ 1A	0.5 (−30 ≤ V _{IN} ≤ −14.5) 0.5			0.5 (−30 ≤ V _{IN} ≤ −17.5) 0.5			mA V mA
V _n	Output Noise Voltage	T _A = 25°C, 10 Hz ≤ f ≤ 100 Hz	300			375			μV
	Ripple Rejection	f = 120 Hz	54 70 (−25 ≤ V _{IN} ≤ −15)			54 70 (−30 ≤ V _{IN} ≤ −17.5)			dB V
	Dropout Voltage	T _J = 25°C, I _{OUT} = 1A	1.1			1.1			V
I _{OMAX}	Peak Output Current	T _J = 25°C	2.2			2.2			A
	Average Temperature Coefficient of Output Voltage	I _{OUT} = 5 mA, 0 C ≤ T _J ≤ 100°C	−0.8			−1.0			mV/°C

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee Specific Performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.

Note 2: Refer to Typical Performance Characteristics and Design Considerations for details.

Note 3: Regulation is measured at a constant junction temperature by pulse testing with a low duty cycle. Changes in output voltage due to heating effects must be taken into account.

Typical Applications (Continued)

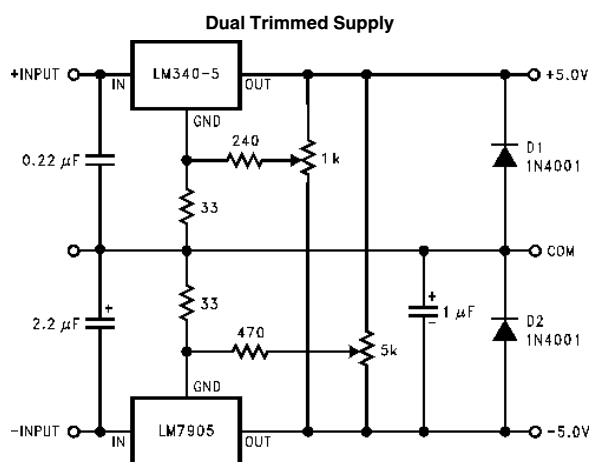

TL/H/7340-4

The LM79XX fixed voltage regulator series has thermal overload protection from excessive power dissipation, internal short circuit protection which limits the circuit's maximum current, and output transistor safe-area compensation for reducing the output current as the voltage across the pass transistor is increased.

Where:

 θ_{SA} = Heat Sink-to-Ambient Thermal Resistance
$$P_{D \text{ MAX}} = \frac{T_{J \text{ Max}} - T_A}{\theta_{JC} + \theta_{CA}} \text{ or } \frac{T_{J \text{ Max}} T_A}{\theta_{JA}}$$


$$\theta_{CA} = \theta_{CS} + \theta_{SA} \text{ (without heat sink)}$$

$$T_J = T_A + P_D (\theta_{JC} + \theta_{CA}) \text{ or}$$

$$= T_A + P_D \theta_{JA} \text{ (without heat sink)}$$

Bypass capacitors are necessary for stable operation of the LM79XX series of regulators over the input voltage and output current ranges. Output bypass capacitors will improve the transient response by the regulator.

High Stability 1 Amp Regulator

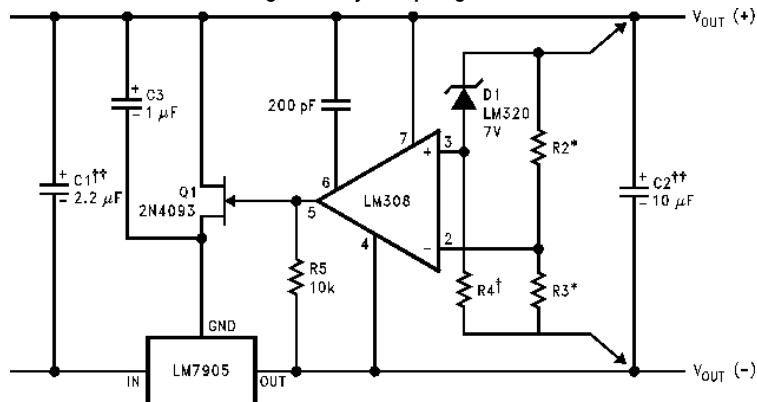

Load and line regulation $< 0.01\%$ temperature stability $\leq 0.2\%$



†Determine Zener current

††Solid tantalum


*Select resistors to set output voltage. 2 ppm/°C tracking suggested

TL/H/7340-5

Typical Applications (Continued)

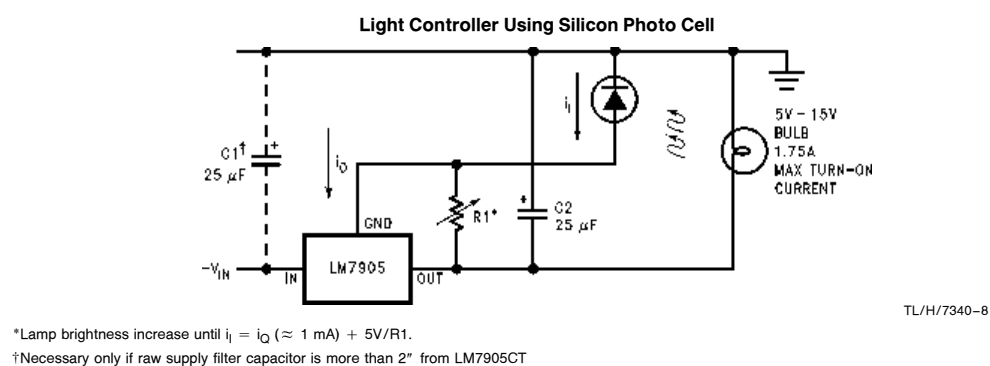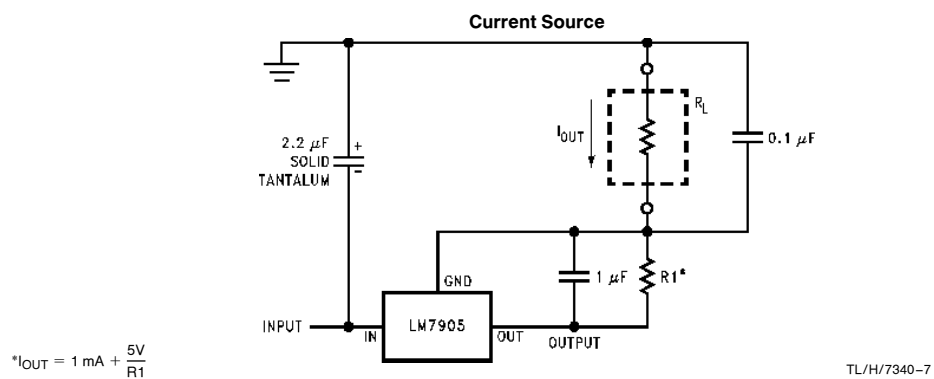

Typical Applications (Continued)

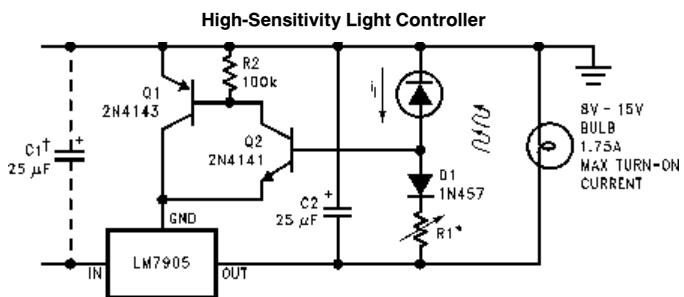


TL/H/7340-9

*Lamp brightness increases until $i_i = 5V/R_1$ (i_i can be set as low as $1 \mu A$)

†Necessary only if raw supply filter capacitor is more than 2" from LM7905

± 15V, 1 Amp Tracking Regulators

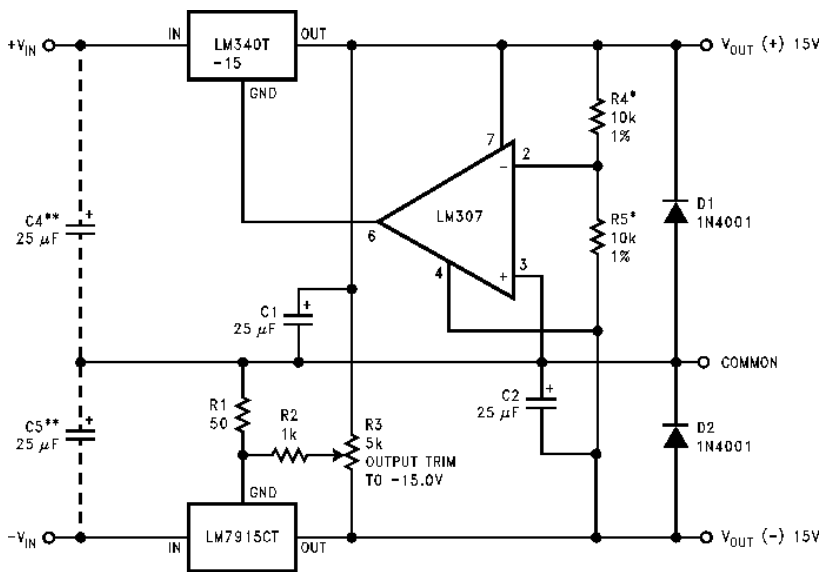


TL/H/7340-1

	(- 15)	(+ 15)
Load Regulation at $\Delta I_L = 1\text{ A}$	40 mV	2 mV
Output Ripple, $C_{IN} = 3000\text{ }\mu\text{F}$, $I_L = 1\text{ A}$	100 μVrms	100 μVrms
Temperature Stability	50 mV	50 mV
Output Noise 10 Hz $\leq f \leq 10\text{ kHz}$	150 μVrms	150 μVrms

*Resistor tolerance of R4 and R5 determine matching of (+) and (-) outputs.


**Necessary only if raw supply filter capacitors are more than 3" from regulators.

Schematic Diagrams

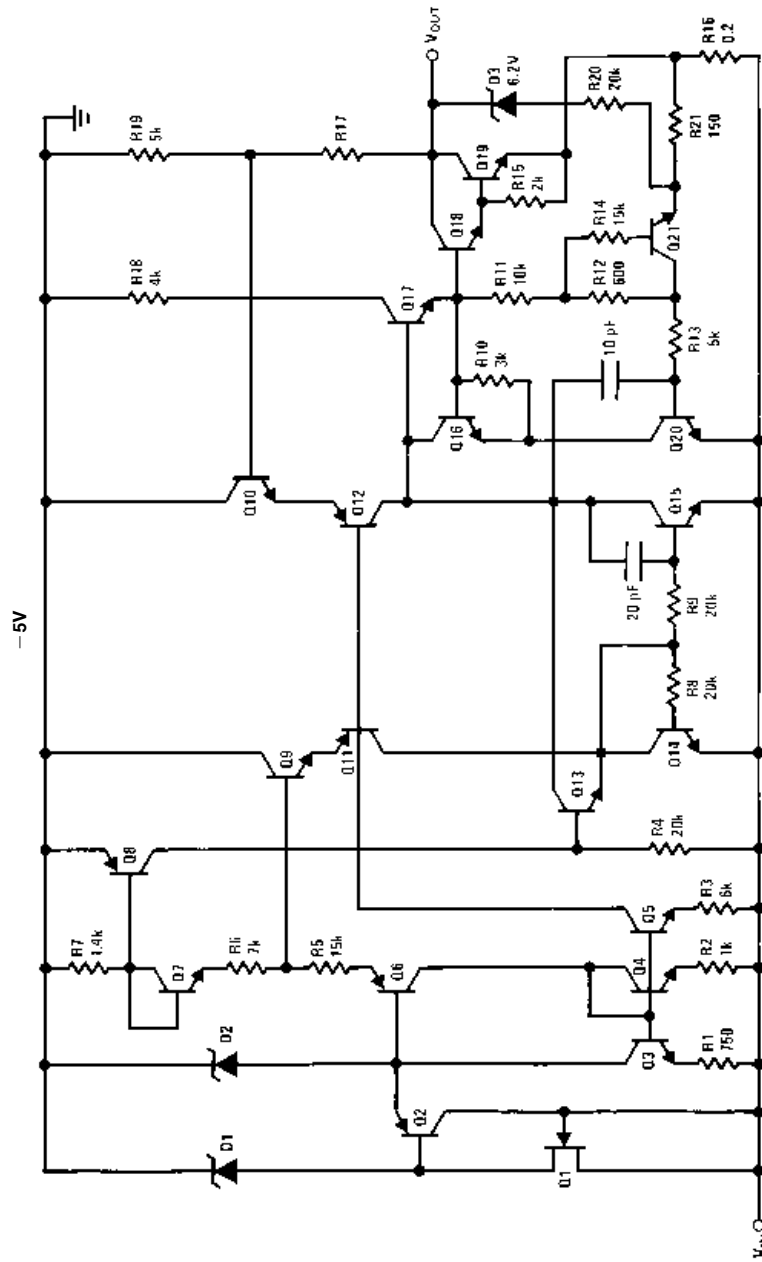

TL/H/7340-12


Schematic Diagrams (Continued)

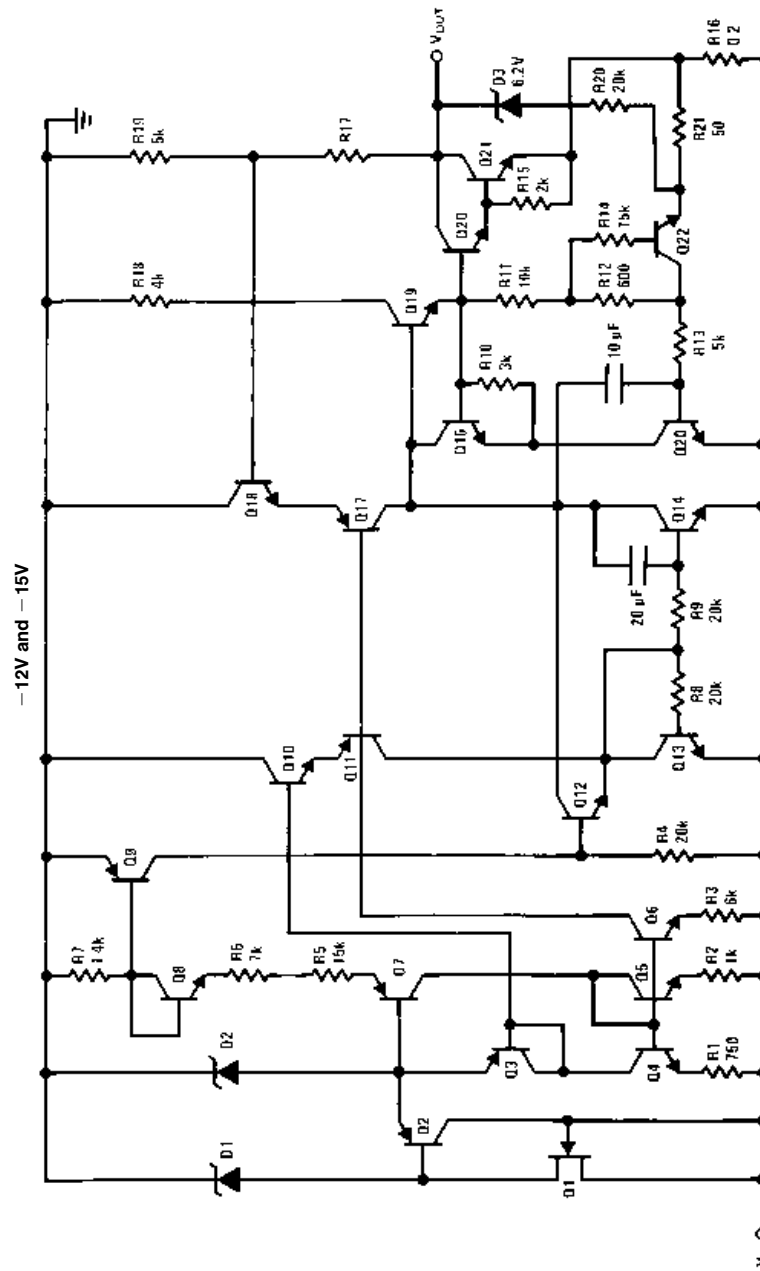

TL/H/7340-13



Physical Dimensions inches (millimeters)

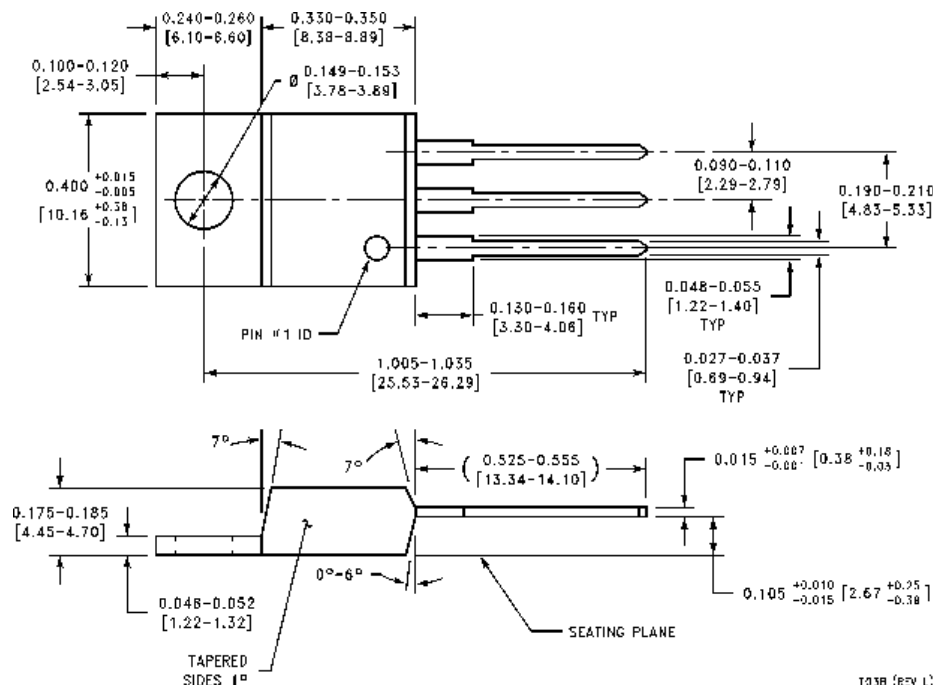

TO-220 Outline Package (T)
Order Number LM7905CT, LM7912CT or LM7915CT
NS Package Number T03B

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: (800) 272-9959
Fax: (800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
19th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408