


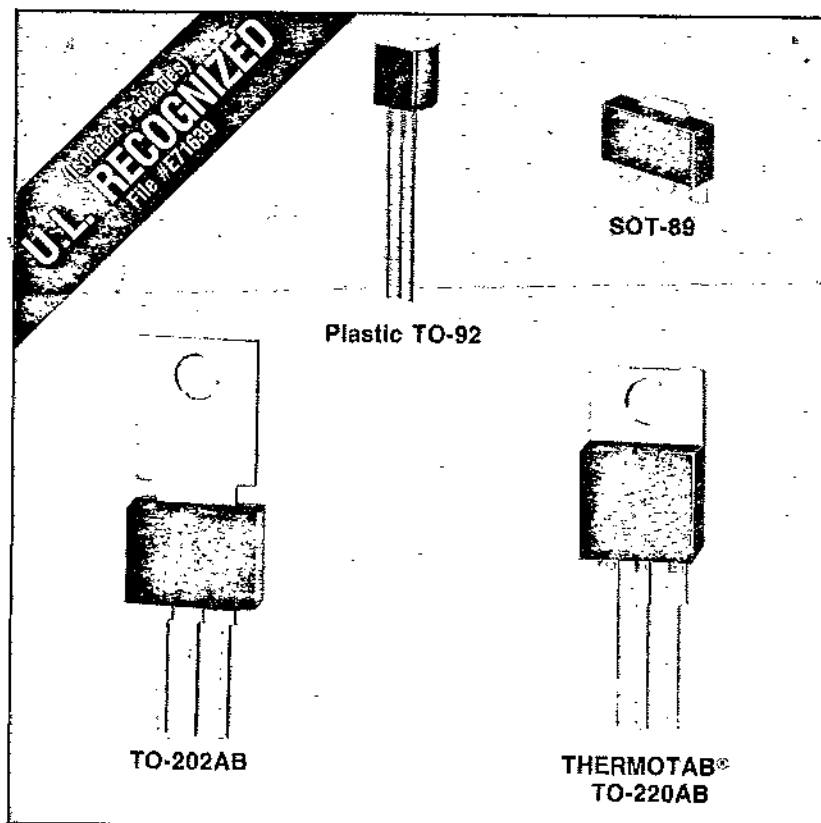

TECCOR
ELECTRONICS, INC.

1801 HURD DRIVE
IRVING, TEXAS 75038-4385
PHONE 214/580-1515
TWX 910-860-5068
TELEX 79-1600

SCR's 0.8-10 AMPS SENSITIVE GATE

General Description

The Teccor Electronics, Inc. line of sensitive SCR semiconductors are half-wave unidirectional gate-controlled rectifiers (SCR-thyristor) which complement Teccor's line of power SCRs. This group of packages offers current ratings from 0.8-10 Amps and Voltage ratings from 15-600 Volts with gate sensitivities from 1.0-500 microamps. If gate currents in the 1-50 milliamp ranges are required, please consult Teccor's non-sensitive gate SCR technical data sheets.

Electrically Isolated Packages

This group of Teccor sensitive SCRs is available in a choice of 5 different product packages. The TO-220AB and TO-92 are electrically isolated where the case or tab is internally isolated to allow the use of low cost assembly and convenient packaging techniques. The SOT-89 package is designed for soldering directly to a metalized substrate or the copper side of printed circuit boards.

Glass Passivation

Teccor's line of SCRs features glass passivated junctions to insure long term device reliability and parameter stability. Teccor's glass offers a rugged, reliable barrier against junction contamination.

Tape and reel packaging is available for the TO-92 and SOT-89 packages.

Features

- Electrically Isolated Packages
- High Voltage Capability up to 600 Volts
- High Surge Capability - up to 100 Amps
- Glass Chip Passivation

SCR's—SENSITIVE GATE

TYPE	Part Number		IT		V _{DRM} & V _{RRM}	IGT	IDRM & I _{RRM}			V _{TM}	V _{GT}			I _H		
	Isolated	Non-Isolated														
			Maximum On-State Current (1)		Repetitive Peak Off-State Forward & Reverse Voltage	DC Gate Trigger Current (2) (11) (17)	Peak Off-State Current @ V _{DRM} & V _{RRM}			Peak On-State Voltage T _C = 25°C (3) (10)	DC Gate Trigger Voltage (4) (11)			DC Holding Current Initial On-State Current = 20mA (5) (14)		
	TO-92	SOT-89	Amps				μAmps				Volts					
				I _{T(RMS)}	I _{T(AV)}	Volts	μAmps	T _C = 25°C	T _C = 100°C	T _C = 125°C	Volts	T _C = -65°C	T _C = 25°C	T _C = 100°C	mA	
FOR DIMENSIONAL OUTLINE & PACKAGE VARIATIONS SEE PG. 67		MAX	MAX	MINIMUM	MAXIMUM	MAX	MAX			MAXIMUM	MAX	MAX	MIN	MAXIMUM		
0.8 Amp	EC103Y		0.8	0.51	30	200	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103A		0.8	0.51	100	200	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103B		0.8	0.51	200	200	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103C		0.8	0.51	300	200	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103D		0.8	0.51	400	200	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103E		0.8	0.51	500	200	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103M		0.8	0.51	600	200	2.0	100		1.7	1.2	0.8	0.1	5.0		
	EC103Y1		0.8	0.51	30	12	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103A1		0.8	0.51	100	12	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103B1		0.8	0.51	200	12	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103C1		0.8	0.51	300	12	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103D1		0.8	0.51	400	12	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103E1		0.8	0.51	500	12	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103M1		0.8	0.51	600	12	2.0	100		1.7	1.2	0.8	0.1	5.0		
	EC103Y2		0.8	0.51	30	50	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103A2		0.8	0.51	100	50	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103B2		0.8	0.51	200	50	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103C2		0.8	0.51	300	50	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103D2		0.8	0.51	400	50	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103E2		0.8	0.51	500	50	1.0	50		1.7	1.2	0.8	0.1	5.0		
	EC103M2		0.8	0.51	600	50	2.0	100		1.7	1.2	0.8	0.1	5.0		
	EC103Y3		0.8	0.51	30	500	1.0	50		1.7		0.8	0.1	8.0		
	EC103A3		0.8	0.51	100	500	1.0	50		1.7		0.8	0.1	8.0		
	EC103B3		0.8	0.51	200	500	1.0	50		1.7		0.8	0.1	8.0		
	EC103C3		0.8	0.51	300	500	1.0	50		1.7		0.8	0.1	8.0		
	EC103D3		0.8	0.51	400	500	1.0	50		1.7		0.8	0.1	8.0		
	EC103E3		0.8	0.51	500	500	1.0	50		1.7		0.8	0.1	8.0		
	EC103M3		0.8	0.51	600	500	2.0	100		1.7		0.8	0.1	8.0		
	2N5060		0.8	0.51	30	200	1.0		50		1.7	1.2	0.8	0.1	5.0	
	2N5061		0.8	0.51	60	200	1.0		50		1.7	1.2	0.8	0.1	5.0	
	2N5062		0.8	0.51	100	200	1.0		50		1.7	1.2	0.8	0.1	5.0	
	2N5063		0.8	0.51	150	200	1.0		60		1.7	1.2	0.8	0.1	5.0	
	2N5064		0.8	0.51	200	200	1.0		50		1.7	1.2	0.8	0.1	5.0	
	2N6564		0.8	0.51	300	200	1.0		100		1.7	1.2	0.8	0.1	5.0	
	2N6565		0.8	0.51	400	200	1.0		100		1.7	1.2	0.8	0.1	5.0	
1.2 Amps		S030US1	1.2	0.76	30	50	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S100US1	1.2	0.76	100	50	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S200US1	1.2	0.76	200	50	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S300US1	1.2	0.76	300	50	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S400US1	1.2	0.76	400	50	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S500US1	1.2	0.76	500	50	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S600US1	1.2	0.76	600	50	2.0	100		1.6	1.2	0.8	0.1	6.0		
		S030US2	1.2	0.76	30	200	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S100US2	1.2	0.76	100	200	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S200US2	1.2	0.76	200	200	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S300US2	1.2	0.76	300	200	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S400US2	1.2	0.76	400	200	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S500US2	1.2	0.76	500	200	1.0	50		1.6	1.2	0.8	0.1	6.0		
		S600US2	1.2	0.76	600	200	2.0	100		1.6	1.2	0.8	0.1	6.0		

GENERAL NOTES

- Teccor 2N5060 & 2N6564 Series devices conform to all JEDEC registered data
- The case temperature (T_C) is measured as shown on dimensional outline drawings. See package dimensions section of this catalog
- All measurements (except IGT) are made with an external resistor R_{GK} = 1kΩ unless otherwise noted
- All measurements are made at 60Hz with a resistive load at an ambient temperature of +25°C unless otherwise specified

- Operating temperature (T_J) is -65°C to +110°C for EC Series devices and SOT-89 devices -65°C to +125°C for 2N Series devices, and -40°C to +110°C for all others
- Storage temperature range (T_S) is -65°C to +150°C for TO-92 and SOT-89 devices -40°C to +150°C for TO-202 devices and -40°C to +125°C for all others
- Lead solder temperature is a maximum of +230°C for 10 seconds maximum ≥ 1/16" from case (For SOT-89 devices see soldering notes on page 101)

Electrical Specifications

8872819 TECCOR ELECTRONICS INC

73C 01028

D T-25-06


8872819 TECCOR ELECTRONICS INC 73C 01028 D T-25-01											
	IGM	VGRM	PGM	PG(AV)	ITSM		dv/dt	di/dt	Igt	tq	Izt
	Peak Gate Current (16)	Peak Reverse Gate Voltage	Peak Gate Power Dissipation (16)	Average Gate Power Dissipation	Peak One Cycle Surge Forward Current (6) (12)		Critical Rate Of Rise Of Off-State Voltage	Maximum Rate Of Change Of On-State Current IGT = 50mA With 0.1 μs Rise Time	Gate Controlled Turn-On Time Gate Pulse = 10mA Min. Width = 5μs With Rise Time ≤ 0.1μs (8)	Circuit Commutated Turn-Off Time (9)	RMS Surge (Non-Repetitive) On-State Current For A Period Of 8.3 msec For Fusing
	Amp	Volts	Watts	Watts	Amps		Volts/μs				
					60Hz	50Hz	TC = 25°C				
	MAXIMUM	MINIMUM	MAXIMUM	MAXIMUM	MAX	MAX	MINIMUM		MAXIMUM	MAXIMUM	MAXIMUM
	1.0	5.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	15	50	2.2	50	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	15	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	10	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	10	50	2.0	60	1.6
	1.0	5.0	1.0	0.1	20	16	40	50	2.5	45	1.6
	1.0	5.0	1.0	0.1	20	16	40	50	2.5	45	1.6
	1.0	5.0	1.0	0.1	20	16	40	60	2.5	45	1.6
	1.0	5.0	1.0	0.1	20	16	40	50	2.5	45	1.6
	1.0	5.0	1.0	0.1	20	16	30	50	2.5	45	1.6
	1.0	5.0	1.0	0.1	20	16	20	50	2.5	45	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	5.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	6.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	6.0	1.0	0.1	20	16	25	50	2.2	60	1.6
	1.0	6.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	6.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	6.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	6.0	1.0	0.1	20	16	25	50	2.0	60	1.6
	1.0	6.0	1.0	0.1	20	16	20	50	2.0	60	1.6
	1.0	6.0	1.0	0.1	20	16	10	50	2.0	60	1.6
	1.0	6.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	6.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	6.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	6.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	6.0	1.0	0.1	20	16	30	50	2.2	50	1.6
	1.0	6.0	1.0	0.1	20	16	20	50	2.2	50	1.6
	1.0	6.0	1.0	0.1	20	16	15	50	2.2	50	1.6

NOTES TO ELECTRICAL SPECIFICATIONS

- NOTES TO ELECTRICAL SPECIFICATIONS
- 1 See Figures 1 thru 5 for current ratings at specified operating case temperatures
 - 2 See Figure 6 for IGT vs TC
 - 3 See Figure 7 for instantaneous on-state current (IT) vs on-state voltage (VT) - (typical).
 - 4 See Figure 8 for VGT vs TC.
 - 5 See Figure 9 for IT vs TC.
 - 6 For more than one full cycle see Figure 10
 - 7 T106 & T107 devices also have a pulse peak forward current on-state rating (repetitive) of 75 amperes. This rating applies for operation at 60Hz, 75°C maximum tab (or anode) lead temperature, switching from 80 volts peak, sinusoidal current pulse width of 10µsec minimum, 15µsec maximum
 - 8 See Figure 11 for Igt vs IGT
 - 9 Test Conditions as follows:
TC ≤ 80°C rectangular current waveform rate of rise of current ≤ 10 amps/µsec Rate of reversal of

- current ≤ 5 amps/sec $I_{TM} = 1$ amp (50 μ sec Pulse) Repetition Rate = 60pps $V_{RRM} =$ Rated
 $V_R = 15$ volts minimum, $V_{DRM} =$ Rated rate of rise reapplied forward blocking voltage $= 5$ volts/sec
 Gate Bias = 0 volts, 100 OHMS (during turn-off time interval)
- 10 Test condition is maximum rated RMS current except TO-92 devices are 1/2 A_{PK} T106/T107 devices are 4 A_{PK}
 - 11 $V_D = 6$ VDC, $R_L = 100\Omega$. See Figure 14 for simple test circuit for measuring gate trigger voltage and gate trigger current
 - 12 See Figure 1 thru 5 for maximum allowable case temperature @ maximum rated current
 - 13 $I_{GT} = 500\mu A$ maximum for $T_C = -40^\circ C$ for T106 devices
 - 14 $I_H = 10mA$ maximum for $T_C = -65^\circ C$ for 2N5060 Series and 2N5564 Series devices
 - 15 $I_H = 6mA$ maximum for $T_C = -40^\circ C$ for T106 devices
 - 16 Pulse Width $\leq 3\mu s$
 - 17 $I_{GS} = 350\mu A$ maximum @ $T_C = -65^\circ C$ for 2N5060 Series and 2N5564 Series devices

SCR's—SENSITIVE GATE

TYPE	Part Number		I _T		V _{ORM} & V _{RRM}	I _{GT}	I _{DRM} & I _{RRM}			V _{TM}	V _{GT}			I _H
	Isolated	Non-Isolated												
														
	K A G TO-220AB	K A G TO-202AB	Amps				μAmps				Volts			mA
			I _T (RMS)	I _T (AV)	Volts	μAmps	T _C = 25°C	T _C = 100°C	T _C = 110°C	Volts	T _C = 40°C	T _C = 25°C	T _C = 100°C	T _C = 25°C
FOR DIMENSIONAL OUTLINE & PACKAGE VARIATIONS SEE PG. 67														
1.6 Amps	S0301LS1		1.6	1.0	30	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0301LS2		1.6	1.0	30	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0301LS3		1.6	1.0	30	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S0501LS1		1.6	1.0	50	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0501LS2		1.6	1.0	50	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0501LS3		1.6	1.0	50	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S1001LS1		1.6	1.0	100	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S1001LS2		1.6	1.0	100	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S1001LS3		1.6	1.0	100	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S2001LS1		1.6	1.0	200	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S2001LS2		1.6	1.0	200	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S2001LS3		1.6	1.0	200	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S4001LS1		1.6	1.0	400	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S4001LS2		1.6	1.0	400	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S4001LS3		1.6	1.0	400	500	2.0	100		1.6	1.0	0.8	0.2	8.0
3.0 Amps	S0303LS1		3.0	1.9	30	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0303LS2		3.0	1.9	30	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0303LS3		3.0	1.9	30	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S0503LS1		3.0	1.9	50	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0503LS2		3.0	1.9	50	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S0503LS3		3.0	1.9	50	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S1003LS1		3.0	1.9	100	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S1003LS2		3.0	1.9	100	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S1003LS3		3.0	1.9	100	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S2003LS1		3.0	1.9	200	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S2003LS2		3.0	1.9	200	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S2003LS3		3.0	1.9	200	500	2.0	100		1.6	1.0	0.8	0.2	8.0
	S4003LS1		3.0	1.9	400	50	2.0	100		1.6	1.0	0.8	0.2	6.0
	S4003LS2		3.0	1.9	400	200	2.0	100		1.6	1.0	0.8	0.2	6.0
	S4003LS3		3.0	1.9	400	500	2.0	100		1.6	1.0	0.8	0.2	8.0
4.0 Amps		T106Q1	4.0	2.5	15	200	2.0		100	2.2	1.0	0.8		5.0
		T106Y1	4.0	2.5	30	200	2.0		100	2.2	1.0	0.8		5.0
		T106F1	4.0	2.5	50	200	2.0		100	2.2	1.0	0.8		5.0
		T106A1	4.0	2.5	100	200	2.0		100	2.2	1.0	0.8		5.0
		T106B1	4.0	2.5	200	200	2.0		100	2.2	1.0	0.8		5.0
		T106C1	4.0	2.5	300	200	2.0		100	2.2	1.0	0.8		5.0
		T106D1	4.0	2.5	400	200	2.0		100	2.2	1.0	0.8		5.0
		T106E1	4.0	2.5	500	200	2.0		100	2.2	1.0	0.8		5.0
		T106M1	4.0	2.5	600	200	2.0		100	2.2	1.0	0.8		5.0
		T107Q1	4.0	2.5	15	500	2.0		100	2.5		0.8		6.0
		T107Y1	4.0	2.5	30	500	2.0		100	2.5		0.8		6.0
		T107F1	4.0	2.5	50	500	2.0		100	2.5		0.8		6.0
		T107A1	4.0	2.5	100	500	2.0		100	2.5		0.8		6.0
		T107B1	4.0	2.5	200	500	2.0		100	2.5		0.8		6.0
		T107C1	4.0	2.5	300	500	2.0		100	2.5		0.8		6.0
		T107D1	4.0	2.5	400	500	2.0		100	2.5		0.8		6.0
		T107E1	4.0	2.5	500	500	2.0		100	2.5		0.8		6.0
		T107M1	4.0	2.5	600	500	2.0		100	2.5		0.8		6.0

GENERAL NOTES

- The case temperature (T_C) is measured as shown on dimensional outline drawings. See package dimensions section of this catalog.
- All measurements (except I_{GT}) are made with an external resistor R_{GK} = 1kΩ unless otherwise noted.
- All measurements are made at 60Hz with a resistive load at an ambient temperature of +25°C unless otherwise specified.

- Operating temperature (T_J) is -65°C to +110°C for "EC" Series devices and SOT-89 devices; -65°C to +125°C for "2N" Series devices; and -40°C to +110°C for all others.
- Storage temperature range (T_S) is -65°C to +150°C for TO-92 and SOT-89 devices; -40°C to +150°C for TO-202 devices; and -40°C to +125°C for all others.
- Lead solder temperature is a maximum of +230°C for 10 seconds maximum $\geq 1/16"$ from case (For SOT-89 devices see soldering notes on page 101.)

SCR's—SENSITIVE GATE

TYPE	Part Number			I _T		V _{ORM} & V _{RRM}	I _{GT}	I _{ORM} & I _{RRM}	V _{TM}	V _{GT}	I _H			
	Isolated	Non-Isolated												
				Maximum On-State Current (1)		Repetitive Peak Off-State Forward & Reverse Voltage	DC Gate Trigger Current (2) (11)	Peak Off-State Current @ V _{ORM} & V _{RRM}	Peak On-State Voltage T _C = 25°C (3) (10)	DC Gate Trigger Voltage (4) (11)	DC Holding Current Initial On-State Current = 20mA (5)			
	K A G TO-220AB	K A G TO-202AB	K A G TO-202AB	Amps				mA		Volts				
				I _T (RMS)	I _T (AV)	Volts	μAmps	T _C = 25°C	T _C = 100°C	Volts	T _C = -40°C	T _C = 25°C	T _C = 100°C	
FOR PACKAGE VARIATIONS & DIMENSIONS SEE PAGE 67				MAX	MAX	MINIMUM	MAXIMUM	MAX	MAX	MAXIMUM	MAX	MAX	MIN	MAXIMUM
4.0 Amps			S0304NS11	4.0	2.5	30	50	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S0304NS21	4.0	2.5	30	200	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S0304NS31	4.0	2.5	30	500	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S0504NS11	4.0	2.5	50	50	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S0504NS21	4.0	2.5	50	200	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S0504NS31	4.0	2.5	50	500	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S1004NS11	4.0	2.5	100	50	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S1004NS21	4.0	2.5	100	200	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S1004NS31	4.0	2.5	100	500	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S2004NS11	4.0	2.5	200	50	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S2004NS21	4.0	2.5	200	200	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S2004NS31	4.0	2.5	200	500	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S4004NS11	4.0	2.5	400	50	.002	0.1	1.6	1.0	0.8	0.2	6.0
			S4004NS21	4.0	2.5	400	200	.002	0.1	1.6	1.0	0.8	0.2	6.0
		S4004NS31	4.0	2.5	400	500	.002	0.1	1.6	1.0	0.8	0.2	6.0	
6.0 Amps	S0306LS2	S0306FS21		6.0	3.8	30	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0306LS3	S0306FS31		6.0	3.8	30	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0506LS2	S0506FS21		6.0	3.8	50	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0506LS3	S0506FS31		6.0	3.8	50	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S1006LS2	S1006FS21		6.0	3.8	100	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S1006LS3	S1006FS31		6.0	3.8	100	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S2006LS2	S2006FS21		6.0	3.8	200	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S2006LS3	S2006FS31		6.0	3.8	200	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S4006LS2	S4006FS21		6.0	3.8	400	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S4006LS3	S4006FS31		6.0	3.8	400	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
8.0 Amps	S0308LS2	S0308FS21		8.0	5.1	30	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0308LS3	S0308FS31		8.0	5.1	30	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0508LS2	S0508FS21		8.0	5.1	50	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0508LS3	S0508FS31		8.0	5.1	50	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S1008LS2	S1008FS21		8.0	5.1	100	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S1008LS3	S1008FS31		8.0	5.1	100	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S2008LS2	S2008FS21		8.0	5.1	200	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S2008LS3	S2008FS31		8.0	5.1	200	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S4008LS2	S4008FS21		8.0	5.1	400	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S4008LS3	S4008FS31		8.0	5.1	400	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
10.0 Amps	S0310LS2	S0310FS21		10.0	6.4	30	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0310LS3	S0310FS31		10.0	6.4	30	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0510LS2	S0510FS21		10.0	6.4	50	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S0510LS3	S0510FS31		10.0	6.4	50	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S1010LS2	S1010FS21		10.0	6.4	100	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S1010LS3	S1010FS31		10.0	6.4	100	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S2010LS2	S2010FS21		10.0	6.4	200	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S2010LS3	S2010FS31		10.0	6.4	200	500	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S4010LS2	S4010FS21		10.0	6.4	400	200	.005	0.2	1.6	1.0	0.8	0.2	6.0
	S4010LS3	S4010FS31		10.0	6.4	400	500	.005	0.2	1.6	1.0	0.8	0.2	6.0

GENERAL NOTES

- The case temperature (T_C) is measured as shown on dimensional outline drawings. See package dimensions section of this catalog.
- All measurements (except I_{GT}) are made with an external resistor $R_{GK} = 1k\Omega$ unless otherwise noted.
- All measurements are made at 60Hz with a resistive load at an ambient temperature of $+25^\circ\text{C}$ unless otherwise specified.

- Operating temperature (T_J) is -65°C to $+110^\circ\text{C}$ for "EC" Series devices and SOT-89 devices -65°C to $+125^\circ\text{C}$ for "2N" Series devices; and -40°C to $+110^\circ\text{C}$ for all others.
- Storage temperature range (T_S) is -65°C to $+150^\circ\text{C}$ for TO-92 and SOT-89 devices -40°C to $+150^\circ\text{C}$ for TO-202 devices; and -40°C to $+125^\circ\text{C}$ for all others.
- Lead solder temperature is a maximum of $+230^\circ\text{C}$ for 10 seconds maximum $\geq 1/16$ from case. (For SOT-89 devices see soldering notes on page 101.)

Electrical Specifications

IGM	VGRM	PGM	PG(AV)	ITSM		dv/dt	di/dt	tgt	tq	I _{2t}
Peak Gate Current (16)	Peak Reverse Gate Voltage	Peak Gate Power Dissipation (16)	Average Gate Power Dissipation	Peak One Cycle Surge Forward Current (6) (7) (12)		Critical Rate Of Rise Of Off-State Voltage	Maximum Rate Of Change Of On-State Current IGT = 50mA With 0.1 μs Rise Time	Gate Controlled Turn-On Time Gate Pulse = 10mA Min. Width = 5μs With Rise Time ≤ 0.1μs (8)	Circuit Commutated Turn-Off Time (9)	RMS Surge (Non-Repetitive) On-State Current For A Period Of 8.3 msec For Fusing
Amps	Volts	Watts	Watts	60Hz	50Hz	Volts/μs	Amps/μs	μs	μs	Amps ² sec
MAXIMUM	MINIMUM	MAXIMUM	MAXIMUM	MAX	MAX	TYP		MAXIMUM	MAXIMUM	MAXIMUM
1.0	6.0	1.0	0.1	30	25	15	50	2.0	60	3.7
1.0	6.0	1.0	0.1	30	25	20	50	2.2	50	3.7
1.0	6.0	1.0	0.1	30	25	20	50	2.5	45	3.7
1.0	6.0	1.0	0.1	30	25	15	50	2.0	60	3.7
1.0	6.0	1.0	0.1	30	25	20	50	2.2	50	3.7
1.0	6.0	1.0	0.1	30	25	20	50	2.5	45	3.7
1.0	6.0	1.0	0.1	30	25	7	50	2.0	60	3.7
1.0	6.0	1.0	0.1	30	25	10	50	2.2	50	3.7
1.0	6.0	1.0	0.1	30	25	10	50	2.5	45	3.7
1.0	6.0	1.0	0.1	30	25	4	50	2.0	60	3.7
1.0	6.0	1.0	0.1	30	25	5	50	2.2	50	3.7
1.0	6.0	1.0	0.1	30	25	5	50	2.5	45	3.7
1.0	6.0	1.0	0.1	30	25	4	50	2.0	60	3.7
1.0	6.0	1.0	0.1	30	25	5	50	2.2	50	3.7
1.0	6.0	1.0	0.1	30	25	5	50	2.5	45	3.7
1.0	6.0	1.0	0.1	100	83	20	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	20	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	20	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	20	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	10	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	10	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	20	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	20	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	20	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	20	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	10	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	10	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	20	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	20	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	20	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	20	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	10	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	10	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100	2.5	45	41
1.0	6.0	1.0	0.1	100	83	5	100	2.2	50	41
1.0	6.0	1.0	0.1	100	83	5	100			

SCR'S—SENSITIVE GATE

8872819 TECCOR ELECTRONICS INC

73C 01033 D T-45-01

THERMAL RESISTANCE (STEADY STATE) $R_{\theta JC}/R_{\theta JA}$ °C/W (TYPICAL)					
Type					
	PLASTIC TO-92	SURFACE MOUNT SOT-89	THERMOTAB TO-220AB	TYPE 2 TO-202AB	TYPE 1 & 3 TO-202AB
0.8 Amp	75/160				
1.2 Amps		50			
1.6 Amps			6.5		
3.0 Amps			6.0		
4.0 Amps					
	T106— T107 "N" PACKAGE			10/100	6.2/80
				9.5/70	5.6/52
6.0 Amps			4.0		4.3
8.0 Amps			3.4		3.9
10.0 Amps			3.0		3.4

ELECTRICAL ISOLATION FROM LEADS TO CASE (U.L. RECOGNIZED FILE #E71639)		
TYPE		
VAC(RMS)	PLASTIC TO-92	THERMOTAB TO-220AB
1600	STANDARD	—
2500	NO	STANDARD
4000	NO	OPTIONAL*

*For 4000V Isolation use "V" Suffix

ELECTRICAL ISOLATION

Most Teccor isolated sensitive SCR's will withstand a minimum high potential test of 2500 VAC RMS from leads to case over the device's operating temperature range. See table for other standard and optional isolation ratings.

FIGURE 1 — Maximum Allowable Case Temperature vs RMS On-State Current


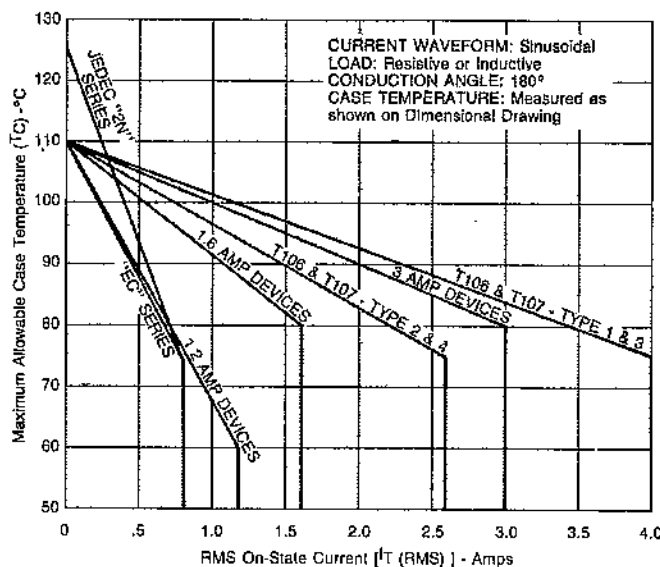


FIGURE 2 — Maximum Allowable Case Temperature vs Average On-State Current

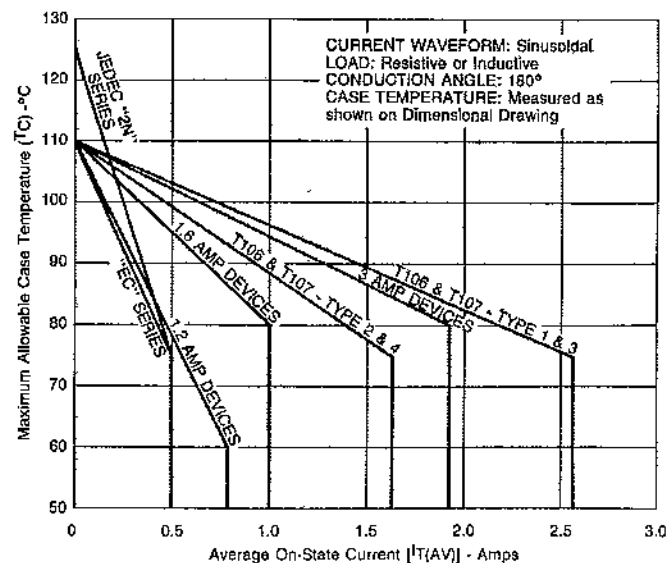

SCR's—SENSITIVE GATE

FIGURE 3A — Maximum Allowable Ambient Temperature vs On-State Current

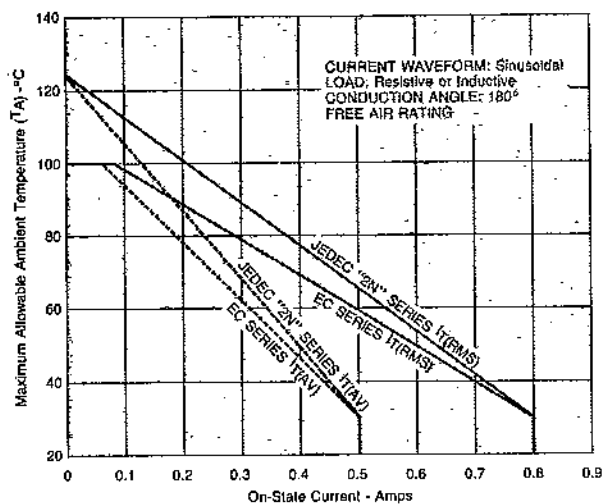


FIGURE 3B — Maximum Allowable Ambient Temperature vs On-State Current

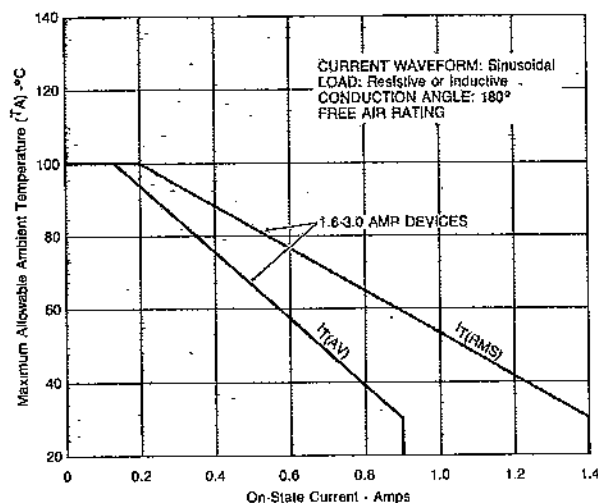


FIGURE 3C — Maximum Allowable Ambient Temperature vs RMS On-State Current


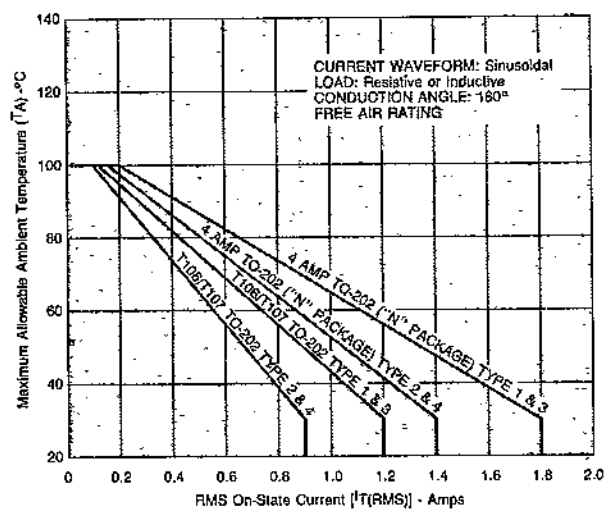


FIGURE 3D — Maximum Allowable Ambient Temperature vs Average On-State Current

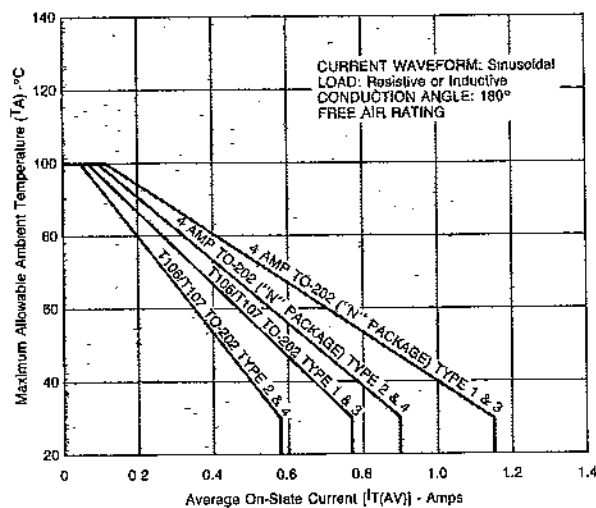

SCR's—SENSITIVE GATE

FIGURE 4 — Maximum Allowable Case Temperature vs RMS On-State Current

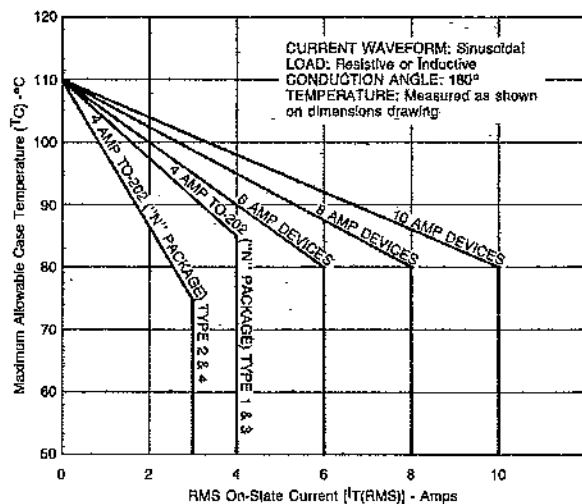


FIGURE 5 — Maximum Allowable Case Temperature vs Average On-State Current

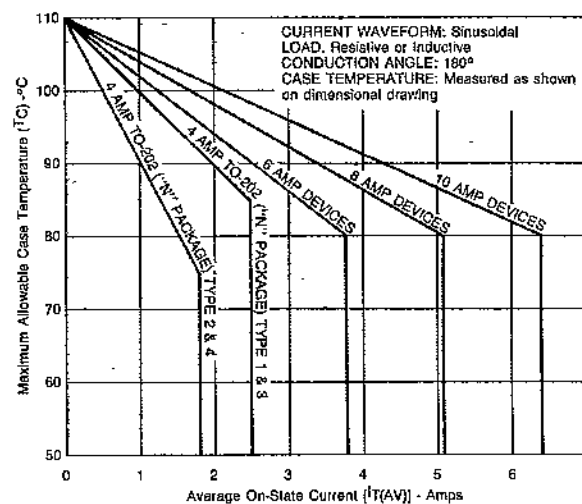


FIGURE 6 — Normalized DC Gate-Trigger Current vs Case Temperature


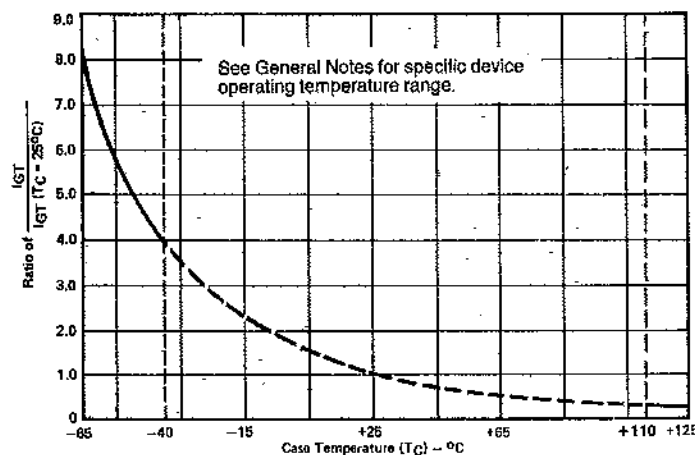


FIGURE 7 — Instantaneous On-State Current vs On-State Voltage (Typical)

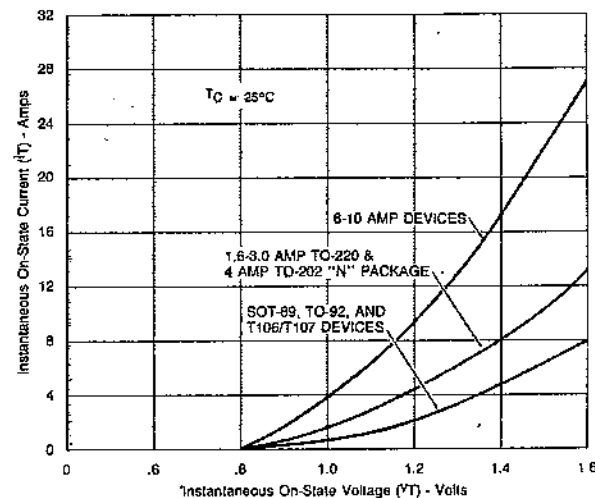

SCR's—SENSITIVE GATE

FIGURE 8 — Normalized DC Gate-Trigger Voltage vs Case Temperature

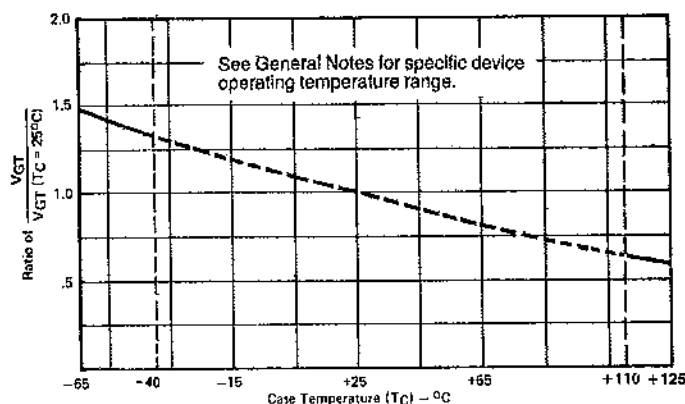


FIGURE 9 — Normalized DC Holding Current vs Case Temperature


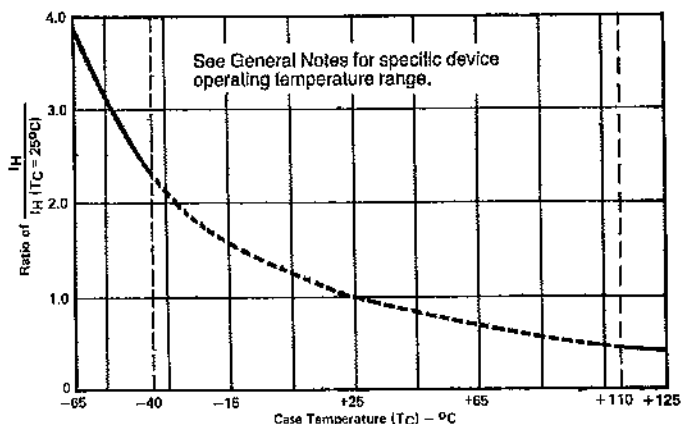


FIGURE 10 — Peak Surge On-State Current vs Surge Current Duration

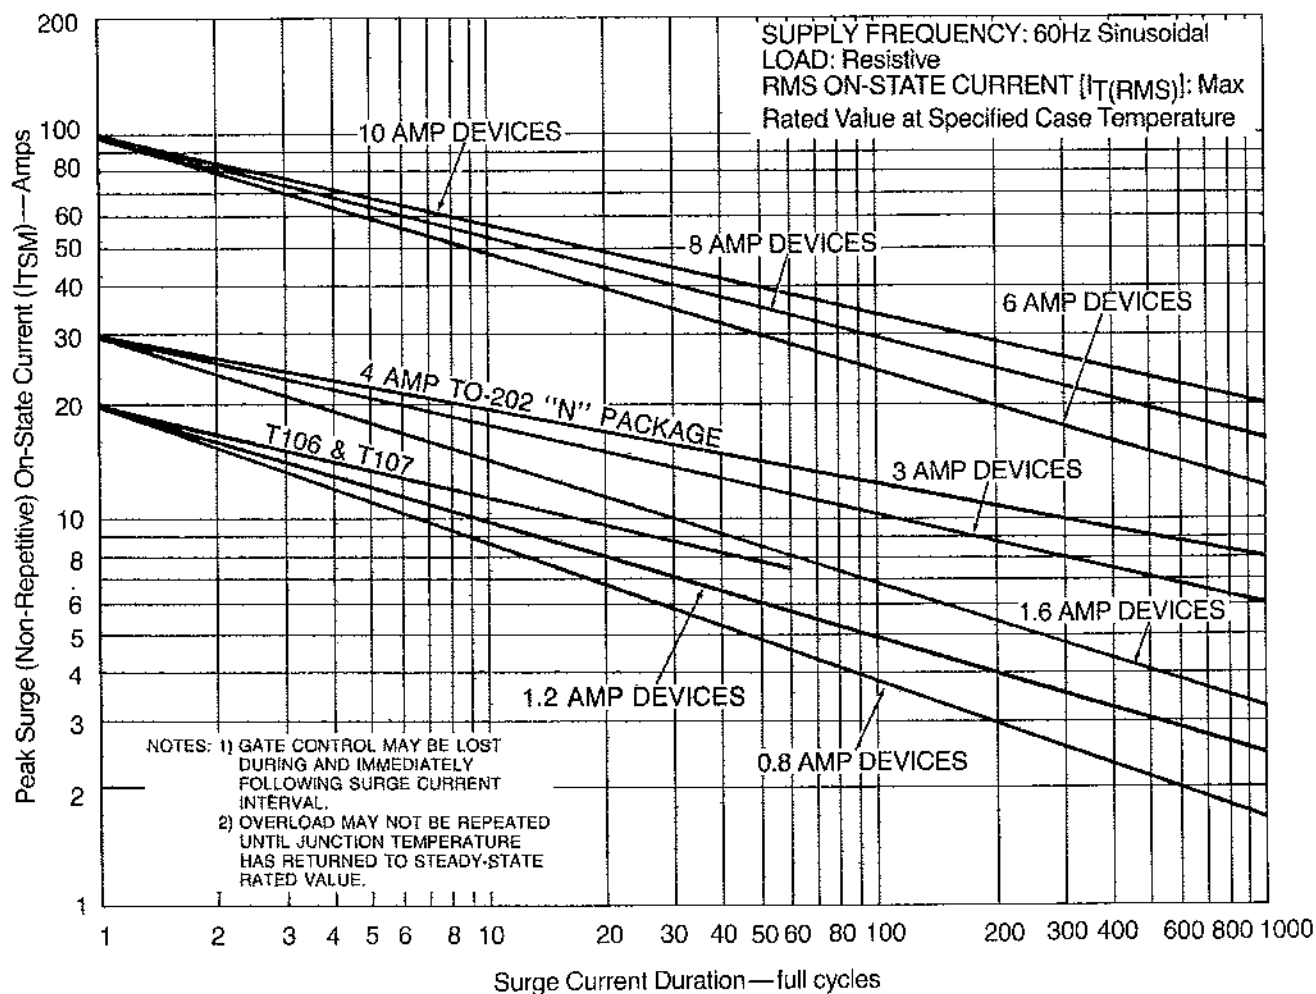

SCR's—SENSITIVE GATE

FIGURE 11 — Typical Turn-On Time
vs Gate Trigger Current

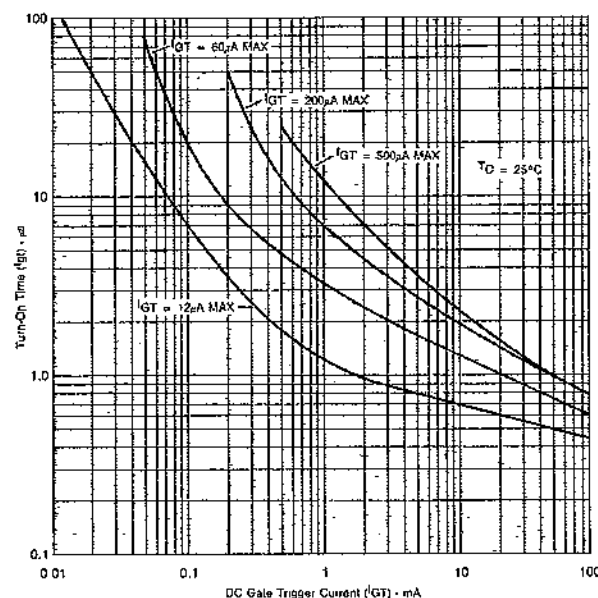


FIGURE 12 — Power Dissipation (Typical)
vs RMS On-State Current

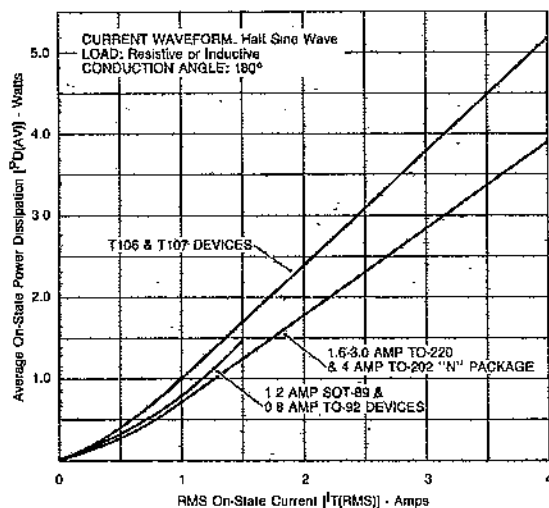


FIGURE 13 — Power Dissipation (Typical)
vs RMS On-State Current


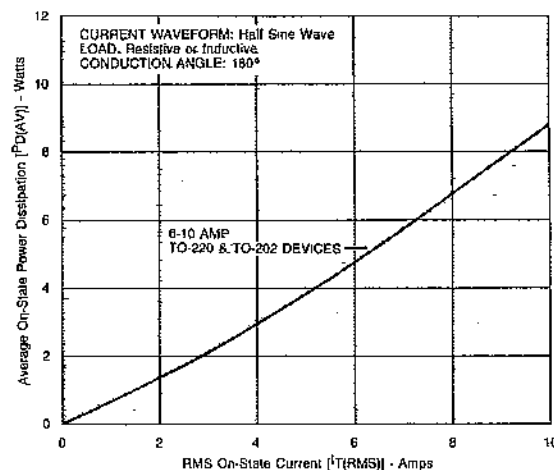


FIGURE 14 — Simple Test Circuit For Gate Trigger
Voltage and Current Measurement

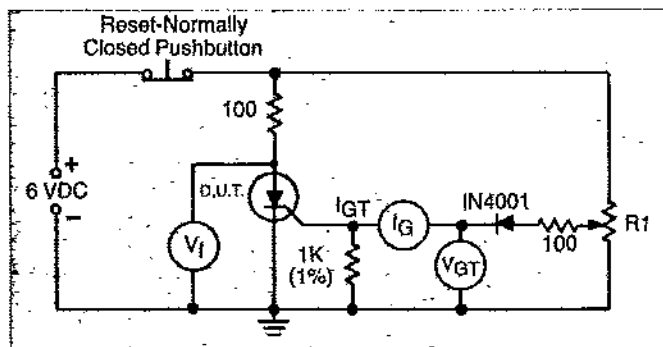

NOTE:

- V_I —0-10 Volt DC meter
- V_{GT} —0-1 Volt DC meter
- I_G —0-1 mA DC milliammeter
- R₁ —1K potentiometer

To measure gate trigger voltage and current, raise gate voltage (V_{GT}) until meter reading V_I drops from 6 Volts to 1 Volt. Gate trigger voltage is the reading on V_{GT} just prior to V_I dropping. Gate trigger current I_{GT} can be computed from the relationship:

$$I_{GT} = I_G - \frac{V_{GT}}{1000} \text{ Amps}$$

where I_G is reading (in Amps) on meter just prior to V_I dropping.
NOTE: I_{GT} may turn out to be a negative quantity (trigger current flows out from gate lead).