



Approvals



Life expectancy



L-10 LIFE AT 40°C:
80 000 hours

AC Motor

Electrical protection: impedance protected
Housing material: zamak
Impeller material: plastic UL 94 VO
Weight: 465 g
Bearing system: ball bearings

Available with:

- Speed sensor
- Connection type: leads

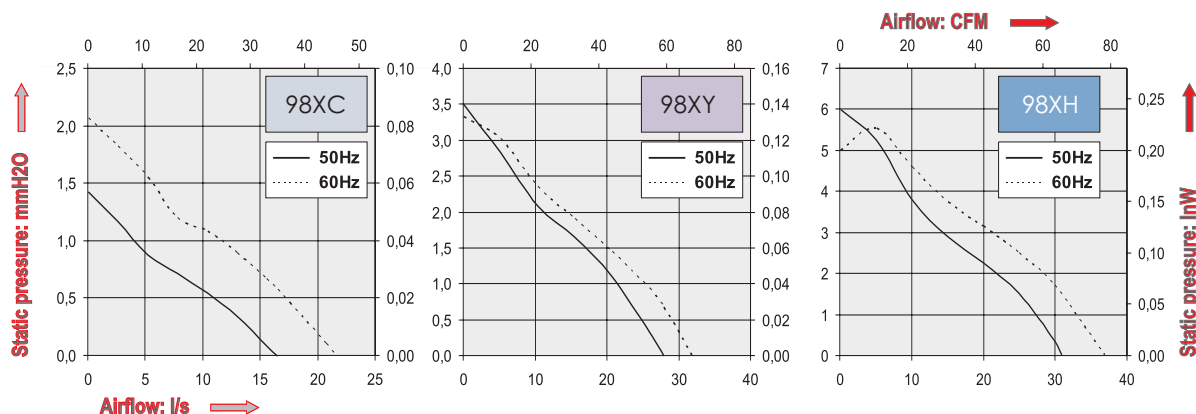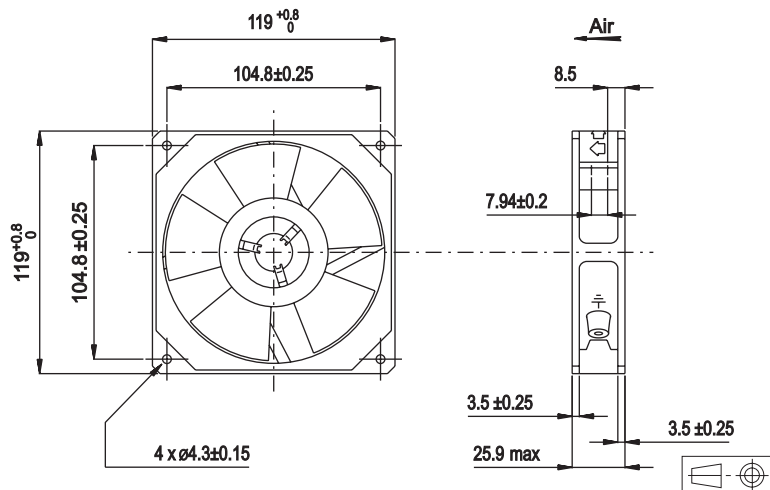

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor	Input Power	Nominal current	Starting current	Connection type		Operating temperature	
	V	l/s	dB(A)	RPM	Hz		µF	W	mA	mA	Leads	Terminals	Min. °C	Max. °C
98XC0182000	115	16	32	1300	50	1		12	130	150		X	-10	70
		21	35	1700	60	1		10	110	130		X	-10	70
98XC0181000	208-240	16	32	1300	50	1		14	80	90		X	-10	70
		21	35	1700	60	1		12	70	75		X	-10	70
98XY0182000	115	27	36	2100	50	1		10	120	140		X	-10	70
		31	38	2400	60	1		9	100	120		X	-10	70
98XY0181000	208-240	27	36	2100	50	1		12	65	80		X	-10	70
		31	38	2400	60	1		10	65	80		X	-10	70
98XH0182000	115	31	41	2555	50	1		13	135	200		X	-10	70
		37	44	3000	60	1		11	110	180		X	-10	70
98XH0181000	208-240	31	41	2550	50	1		15	80	100		X	-10	70
		37	44	3000	60	1		13	65	90		X	-10	70

Additional versions:

others speeds - Salt spray protected - shock and vibration protected - marine specifications - wide temperature range
IP54: consult factory

Accessories:

Refer to Accessories leaflet