


UHF Female(SO239) to UHF Female(SO239) Connector Adapter(UHF-KKV)

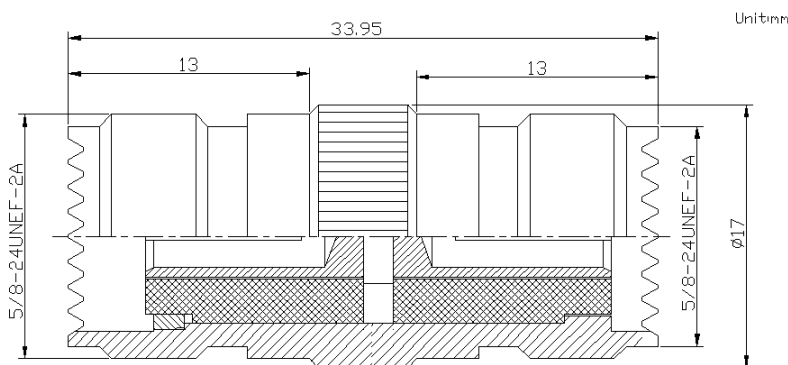

Interface

According to

IEC 61169-12

Electrical

Characteristic Impedance

Non-Constant

Frequency Range

DC-300MHz

VSWR

≤ 1.10 @DC-300MHz

Dielectric Withstanding Voltage

$\geq 2000V$ RMS, 50Hz, at sea level

Working Voltage

$\leq 750V$ RMS, 50Hz, at sea level

Dielectric Resistance

$\geq 5000M\Omega$

Contact Resistance

Center Contact $\leq 5.0m\Omega$

Outer Contact $\leq 5.0m\Omega$

Mechanical

Durability

Mating cycles ≥ 500

Material and plating

	Material
Body	Brass
Insulator	Delrin
Center conductor	Brass

Plating
Ni
-
Au

Environmental

Temperature Range

$-55^{\circ}C \sim +125^{\circ}C$

RoHS

Compliant