


1.0/2.3 Male Straight Crimp Connector For Flex-3 Cable(CC4-C-JFlex3B)

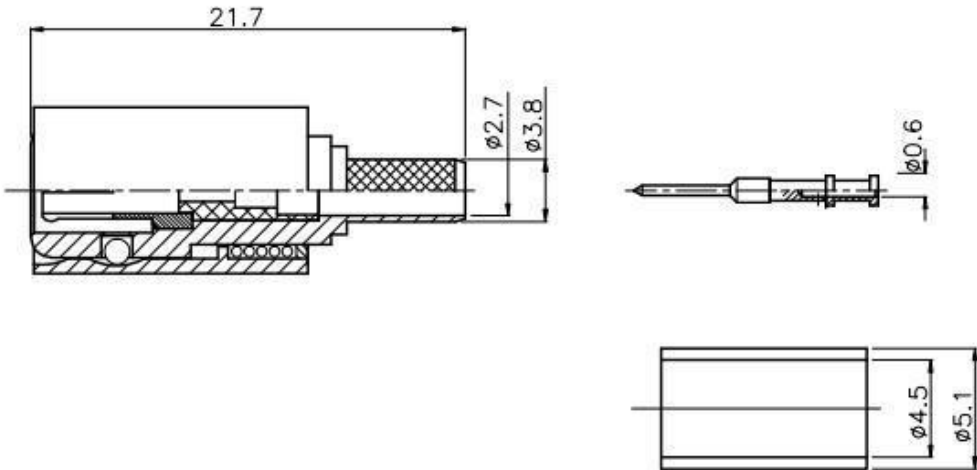

Interface

According to

IEC 61169-29;CECC 22230;DIN47297

Electrical

Characteristic Impedance

75 ohm

Frequency Range

DC-2GHz

VSWR

≤1.30@DC-1GHz

Dielectric Withstanding Voltage

750 V R.M.S,At sea level

Working Voltage

350 V R.M.S,at sea level

Dielectric Resistance

≥1000MΩ

Contact Resistance

Center Contact ≤4mΩ

Outer Contact ≤2.5mΩ

Mechanical

Durability

Mating cycles ≥500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE	—
Center conductor	Phosphor bronze	Au
Resilient Contact	Beryllium bronze	Au
Spring	Stainless steel	—
Ball	Stainless steel	—
Back tail	Brass	Ni
Ferrule	Annealed copper	Ni

Environmental

Temperature Range

-40℃ ~+85℃

RoHs Compliant

Yes