


BNC Male Crimp Connector For Flex-3 Cable(BNC-C-Jflex-3B)

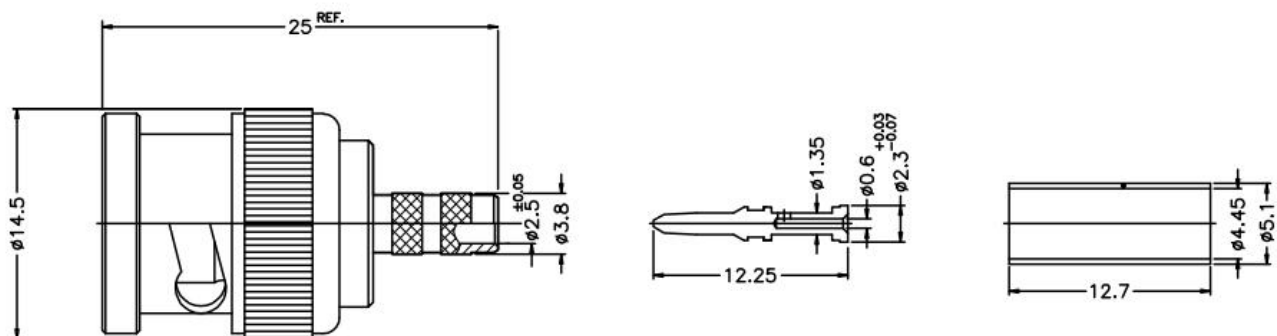

Interface

According to

IEC 60169-8

Electrical

Characteristic Impedance

75 ohm

Frequency Range

DC-4GHz

VSWR

≤1.30@DC-1000MHz

Dielectric Withstanding Voltage

≥1500V RMS,50Hz,at sea level

Dielectric Resistance

≥5000MΩ

Contact Resistance

Center Contact ≤1.5mΩ

Outer Contact ≤1.0 mΩ

Mechanical

Durability

Mating cycles ≥500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE(Teflon)	—
Center conductor	Brass	Au
Coupling bayonet	Brass	Ni
Washer	Brass	Ni
Crimp ferrule	Annealed copper	Ni
Gasket	Silicone rubber	—

Environmental

Temperature Range

-40℃ ~ +85℃

RoHs Compliant