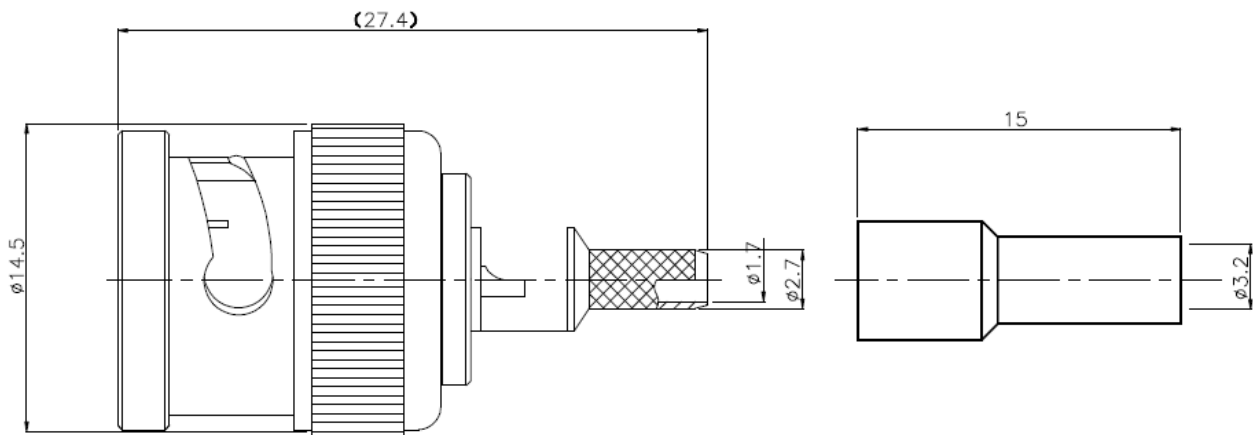

BNC Male Crimp Connector For RG179 Cable(BNC-C-J179D)



Interface

According to

IEC 60169-8

Electrical

Characteristic Impedance

75 ohm

Frequency Range

DC-4GHz

VSWR

≤ 1.25 @DC-1000MHz

Dielectric Withstanding Voltage

≥ 1500 V RMS,50Hz,at sea level

Dielectric Resistance

≥ 5000 M Ω

Contact Resistance

Center Contact ≤ 1.5 m Ω

Outer Contact ≤ 1.0 m Ω

Mechanical

Durability

Mating cycles ≥ 500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Coupling Nut	Brass	Ni
Ferrule	Annealed Copper	Ni
Gasket	Silicone Rubber	-

Environmental

Temperature Range

-40 $^{\circ}$ C ~ +85 $^{\circ}$ C

RoHs Compliant