


BNC Male Crimp Connector For RG8 Cable(BNC-C-J8V)

(Contact attachment:Inner:soldering ;Outer:crimp)

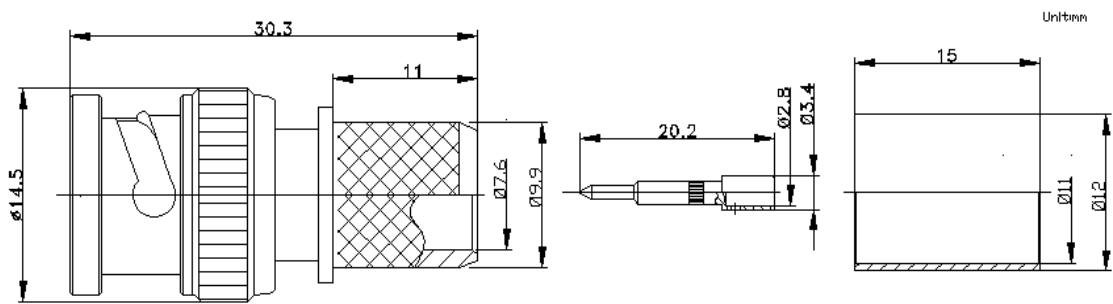

Interface

According to

IEC 60169-8

Electrical

Characteristic Impedance

50 ohm

Frequency Range

DC-4GHz

VSWR

≤1.25@DC-3000MHz

Dielectric Withstanding Voltage

≥1500V RMS,50Hz,at sea level

Working Voltage

≤500V RMS,50Hz,at sea level

Dielectric Resistance

≥5000MΩ

Contact Resistance

Center Contact ≤1.5mΩ

Outer Contact ≤1.0 mΩ

Mechanical

Durability

Mating cycles ≥500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE	—
Center conductor	Phosphor bronze	Au
Coupling nut	Brass	Ni
Washer	Brass	Ni
Ferrule	Annealed copper	Ni
Spring	Stainless steel	—
Gasket	Silicone rubber	—

Environmental

Temperature Range

-40℃ ~ +85℃

RoHS

Compliant

Recommended stripped cable dimension

Crimp tool:.429”Hex

