


SPECIFICATION

N Female for 1/2 Feeder cable
N-K1/2

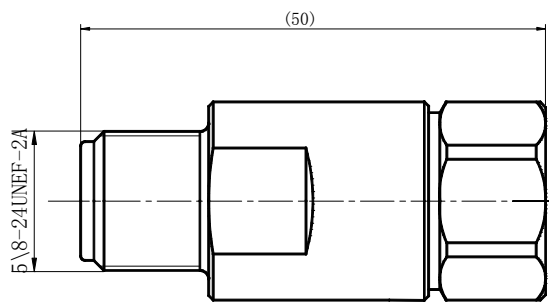

Dimensions are in millimeters

Interface

According to IEC 60169-16

Electrical

Characteristic Impedance	50 ohm
Frequency Range	DC-3GHz
VSWR	≤1.12
Dielectric Withstanding Voltage	≥2500V RMS,50Hz,at sea level
Dielectric Resistance	≥5000M Ω
Contact Resistance	Center Contact ≤1.0m Ω Outer Contact ≤1.0m Ω
PIM	≤-150dBc(2*20W)
Mechanical	
Durability	Mating cycles ≥500 cycles

Material and plating

	Material	plating
Body	Brass	Tri-Alloy
Insulator	PTFE	-
Center conductor	phosphor bronze	Ag

Environmental

Temperature Range -40℃ ~ +85℃