


N Male Right Angle Clamp Connector For RG8 Cable(N-JW8C)

(Inner attachment:non solder ;Outer attachment: clamp)

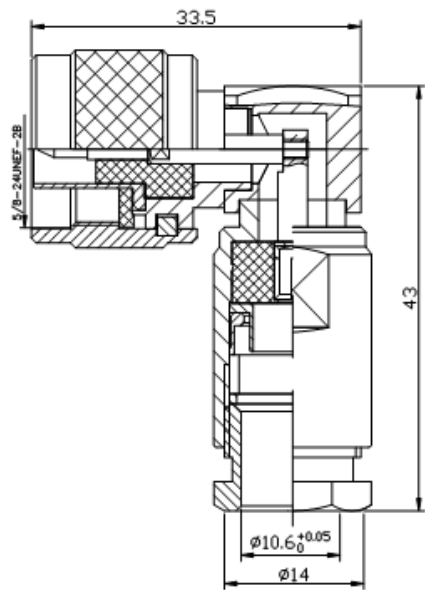

Interface

According to

IEC 60169-16

Electrical

Characteristic Impedance

50 ohm

Frequency Range

DC-11GHz

VSWR

≤1.25 @DC-3000MHz

Insertion Loss

≤0.15dB

Dielectric Withstanding Voltage

≥2500V RMS,50Hz,at sea level

Dielectric Resistance

≥5000MΩ

Contact Resistance

Center Contact ≤1.0mΩ

Outer Contact ≤0.25mΩ

Mechanical

Durability

Mating cycles ≥500

Material and plating

	Material	Plating
Body	Brass	Ni
Insulator	PTFE	—
Center conductor	Phosphor bronze	Au
Coupling nut	Brass	Ni
Washer	Brass	Ag
Cable clamp	Brass	Ag
Gasket	Silicone rubber	—

Environmental

Temperature Range

-40℃～+85℃

Waterproof Rate

IP 67

RoHS Compliant

Yes