


TNC Male Right Angle Crimp Connector For RG8 Cable (TNC-C-JW213)

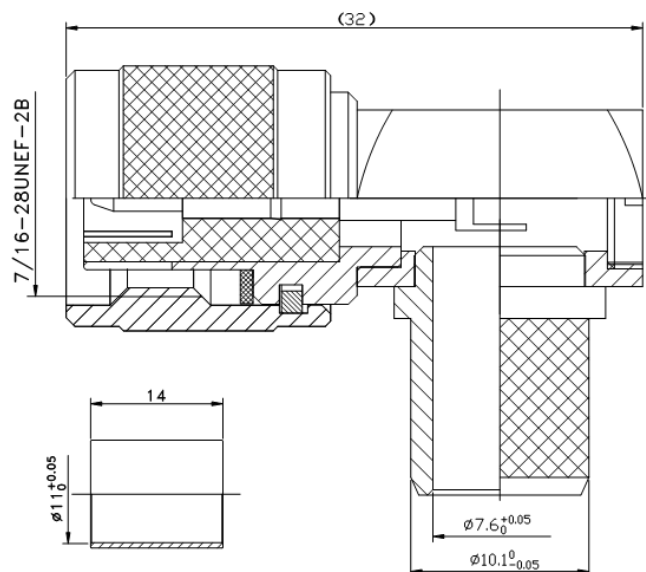

Interface

According to

IEC 60169-17; CECC 22200

Electrical

Characteristic Impedance

50 ohm

Frequency Range

DC-11GHz

VSWR

$\leq 1.25 @ DC-3000MHz$

Dielectric Withstanding Voltage

$\geq 1500V$ RMS, 50Hz, at sea level

Dielectric Resistance

$\geq 5000M\Omega$

Contact Resistance

Center Contact $\leq 10m\Omega$

Outer Contact $\leq 2.5 m\Omega$

Mechanical

Durability

Mating cycles ≥ 500

Material and plating

	Material	Plating
Body	Brass	Au
Insulator	PTFE	-
Center Conductor	Phosphor bronze	Au
Coupling Nut	Brass	Ni
Sealing Cap	Brass	Ni
Ferrule	Annealed Copper	Ni
Gasket	Silicone Rubber	-

Environmental

Temperature Range

$-40^{\circ}C \sim +85^{\circ}C$

RoHs Compliant

Notes: It can be suited to RG213 cable also.