
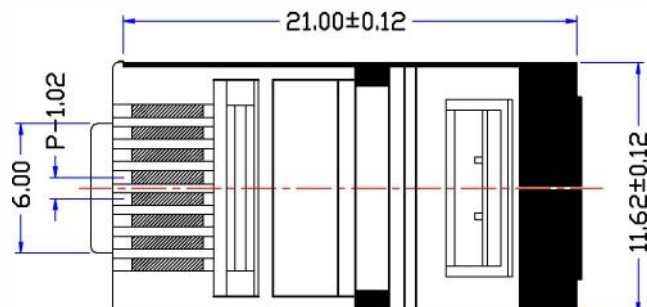
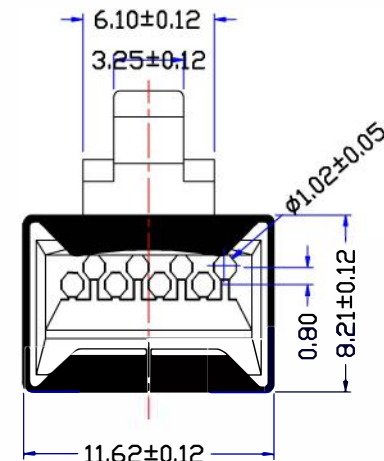
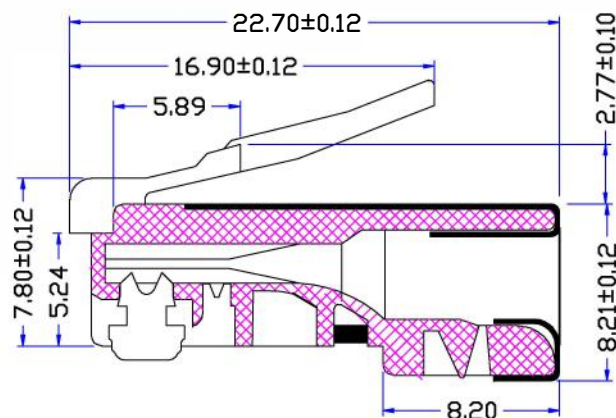


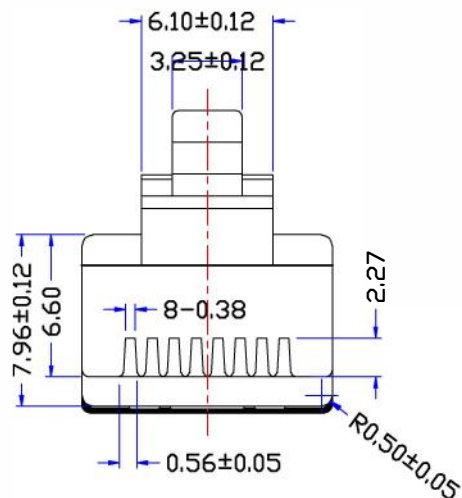

FEATURES:

1 Electrical Test:

A. 250V AC max at 2 amps.

B. Dielectric with standing 500volts AC.

C. Insulation Resistance: 500 megaohms.

D. Termination Resistance: 35megaohms.

2 Mechanical:

A. Cable-to-Plug tensile strength-20LBs (89N) min.

B. Durability: 500 mating cycles.

C. gold plating(口01, 口03, 口06, 口15, 口30, 口50)U"

REV. NO.	ECN NO.	DATE	DRAW	APPROVE

REV. 版本	A/0	DATE 日期	UNITS 单位	MM	TITLE 产品名称	8P8C(R)
DRAWN 绘图	Diayao	2013. 09. 01	SCALE 比例	FULL	PART NO. 产品编号	XL-514 MP8P8C CAT6屏蔽SHIELDING 双屏蔽
APPROVED 审核	Yynab	MATERIAL 材质	TOL. 公差	0.00 ±0.12	VIEW 视图	第三角法
FIRERATING 防火等级	94V0	PC (聚碳酸酯)				