


SPECIFICATION

1/2"Feeder jumper, 7/16 Male Straight to 4.3/10 Male Straight, L(m)

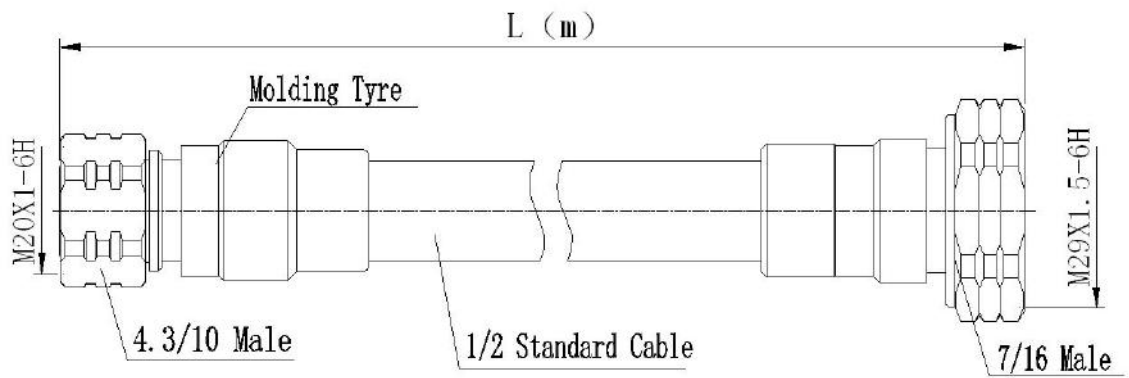

Dimensions are in millimeters

Interface

According to	IEC 61169-54
	IEC 60169-4

Electrical

Characteristic Impedance	50 ohm
Frequency Range	DC-6GHz
VSWR	(DC-3GHz)≤1.12
PIM (@2-tonex20w)	≤-160dBc
Dielectric Withstanding Voltage	≥2500V RMS,50Hz,at sea level
Dielectric Resistance	≥5000M Ω
Insert Loss	0.2+(0.209×L)dB

Mechanical

Durability	Mating cycles ≥100 cycles
------------	---------------------------

Material and plating

	Material	plating
Body	Brass	Tri-Alloy
Insulator	PTFE	-
Center conductor	Brass	Ag
Other	Brass	Ni

Environmental

Temperature Range	-40℃～+85℃
Watertightness	IP67
Rosh-compliance	Full ROHS compliance
Salt-fog test	96h