


## PATCH CORD SC/APC-SC/APC SM SX 3.0 LSZH 3M

$$L=X+100/0\text{mm}$$

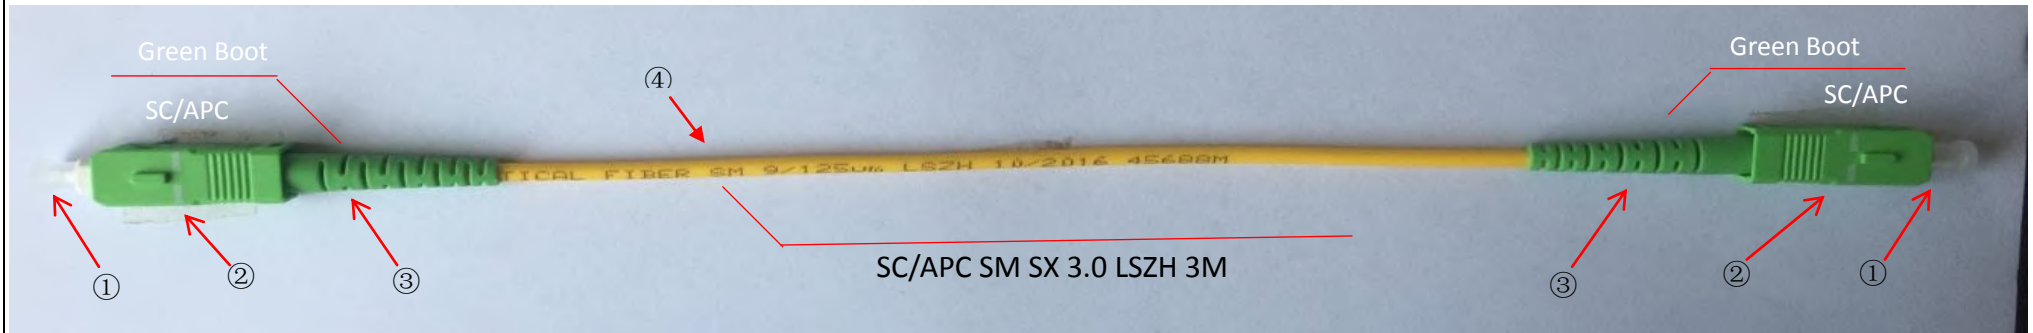

| Patch cord Length                 |              |
|-----------------------------------|--------------|
| Length(M)                         | Tolerance(M) |
| $0 < L < 1.0$                     | $\pm 0.05$   |
| $1.0\text{m} \leq L < 20\text{m}$ | $\pm 0.10$   |
| $20\text{m} \leq L$               | $\pm 1\%XL$  |

|    |                                                                |       |        |
|----|----------------------------------------------------------------|-------|--------|
| ④  | SM 9/125 Simplex 3.0 LSZH Cable(Yellow)                        | 3M    |        |
| ③  | SC 3.0 Boot (Green)                                            | 2     |        |
| ②  | SC/APC Simplex Connector SM $\varnothing 3.0\text{mm}$ (Green) | 2     |        |
| ①  | SC Dust Cap (Transparent)                                      | 2     |        |
| NO | Part name                                                      | QT' Y | REMARK |

Note:

1. Insertion Loss:  $< 0.3\text{dB}@850\text{nm}$
2. End surface test is according to 0P-03-05001
3. Test standard: gr-326-CORE
4. Test report has to match the serial No
5. ROHS Compliant
6. Fiber cable according to IEC 60793-2
7. LC connector according to IEC61754-20

|             |                                            |          |  |
|-------------|--------------------------------------------|----------|--|
| SC-SC SM 3M | PATCH CORD SC/APC-SC/APC SM SX 3.0 LSZH 3M |          |  |
| Part No.    | DESCRIPTPONS                               |          |  |
|             |                                            |          |  |
| CUSTOMER    |                                            | ITEM NO. |  |