


Product Specification

Model No: PTE-M003 U229

1. Drawing (Unit mm)

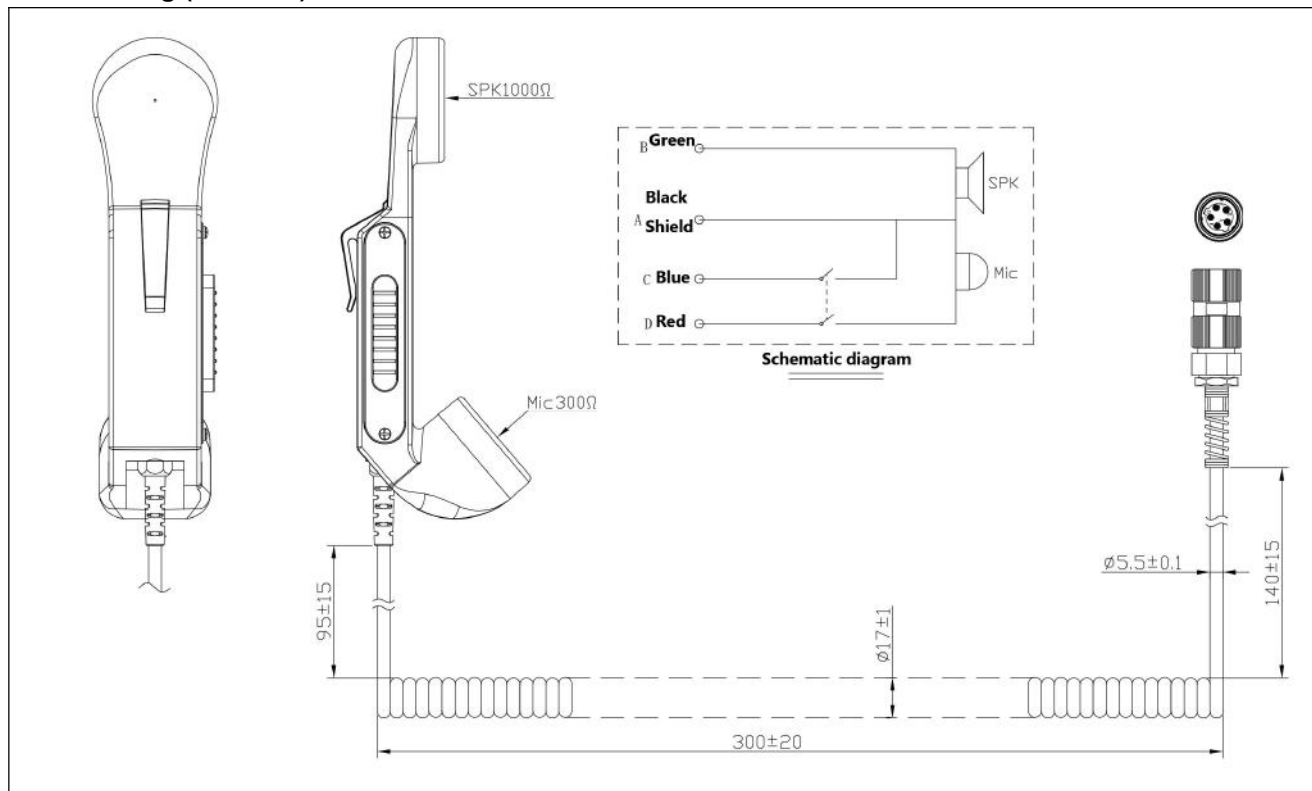

2. Picture



3. Speaker Specification

Type	Transducer Moving coil dynamic speaker
Impedance	1000Ω±15% @1KHZ
Sensitivity	112dB±4dB at 1K at 1mW
Frequency respond	300-4KHZ
Rated input power	0.5W
Maximum input power	1W

4. Microphone Specification

Type	Transducer Moving coil dynamic MIC
Sensitivity Range	-53±3 dB At 1KHz
Impedance Max	300Ω at 1kHz
Frequency	500-6KHz

5.Environmental Conditions

Operating Temperature	-30℃~70℃
Relative Humidity	<96%
Atmospheric Pressure	86kPa~106kPa