


WIRE CONFIGURATION

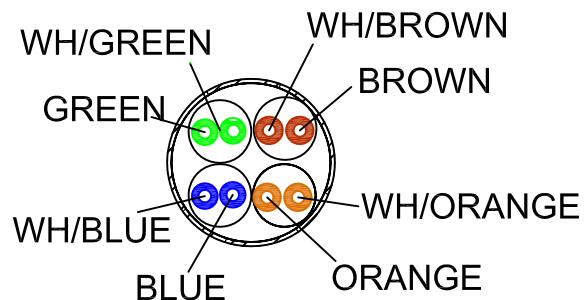

NOTES:

- 1、Electrical testing:100%
- 2、Visual inspection:100%
- 3、ROHS Compliant

PIN ASSIGNMENT

P1		P2	COLOR
1		1	WH/ORANGE
2		2	ORANGE
3		3	WH/GREEN
6		6	GREEN
4		4	BLUE
5		5	WH/BLUE
7		7	WH/BROWN
8		8	BROWN

②		W/RJ45(without shielded)	GOLD 3U"	RJ45 PVC color: GRAY
①	JACKET	O.D: 5+/-0.2mm	L=2000+/-30mm	PVC color: GRAY
	DRAIN WIRE	/	/	/
	INSULATION	OD:0.80+/-0.10mm	HDPE	COLORED DIFFERENT LAYS
	CONDUCTOR	26AWG	CCA	4 PAIRS
NO	DESCRIPTION	SPECIFICATION	MATERIAL	REMARKS

DESCRIPTION:				PATCH CORD UTP CAT-5E			
GENERAL TOLERANCE				CUSTOMER: EIP00005-1		DATE:	
X.	±1.0	X°	±2.0°	CUS NO: 1700117052		DRAWING: ZHY	
.X	±0.2	.X°	±1.0°	PART NO:		CHECKED: Ford	
.XX	±0.01	.XX°	±0.5°	SY NO:		APPROVED: Dong	
THIRD ANGLE PROJECT				SCALE	SHEET	UNIT	REV
				NONE	1/1	MM	A/0
				ECN NO			