


Adaptor N male to N female right angle(N-JKW-1)



SPECIFICATION

Adaptor N male to N female right angle
(N-JKW-1)

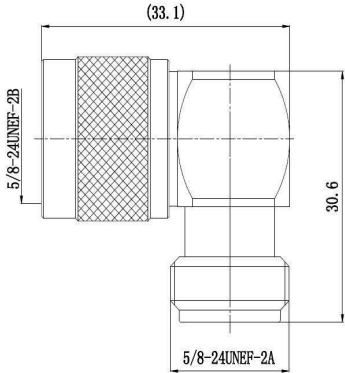

Interface

According to: IEC 60169-4

Electrical Performance

Characteristic Impedance: 50 ohm
Frequency Range: DC-3GHz
VSWR: ≤ 1.10
PIM3: $\leq -155\text{dBc}$
Dielectric Withstanding Voltage: $\geq 2500\text{V}$
RMS,50Hz,at sea level
Dielectric Resistance: $\geq 10000\text{M}\Omega$
Contact Resistance: Center
Contact $\leq 1.0\text{m}\Omega$ Outer Contact $\leq 1.0\text{m}\Omega$
Durability: Mating cycles ≥ 500

Material and plating

Body: Brass, Tri-Alloy plating
Insulator: PTFE, NATURAL
Contact PIN: Brass,Ag plating

Environmental

Temperature Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Waterproof(1m water depth, 24hours): P68
RoHS: Full RoHS-Compliance

All products appearance, technical performance and electroplating can be customized according to customer requirements.