


SPECIFICATION

DIN 7/16 FEMALE TO DIN 7/16 FEMALE ADAPTOR

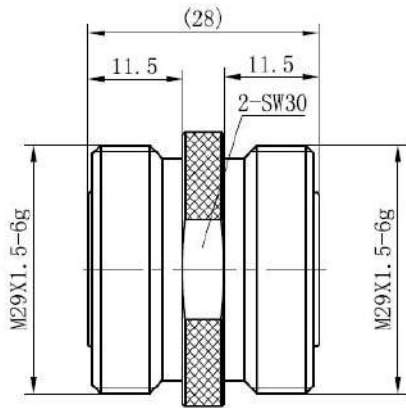

Item No.:7/16-KK-1

Standard

IEC60169-4

Electrical requirements

Impedance	50Ω
Frequency	DC~6GHz
VSWR	≤1.1
PIM3	≤-160dBc
Dielectric Withstanding Voltage	≥4000V rms, 50Hz
Dielectric Resistance	≥10000MΩ
Contact Resistance	Outer contact≤0.4mΩ Center contact≤0.2mΩ

Mechanical requirements

Durability	≥500Mating cycles
------------	-------------------

Material and plating

	Material	Plating
Body	Brass	Tri-alloy
Center conductor	Phosphor bronze	Ag
Insulator	PTFE	-
Other	Brass	Ni

Environmental

RoHS-compliance	Full RoHS compliance
Watertightness	IP67
Salt-fog test	96h
Temperature Range	-40℃~+85℃